


VC-A50P PTZ Video Camera

Installation Guide - English

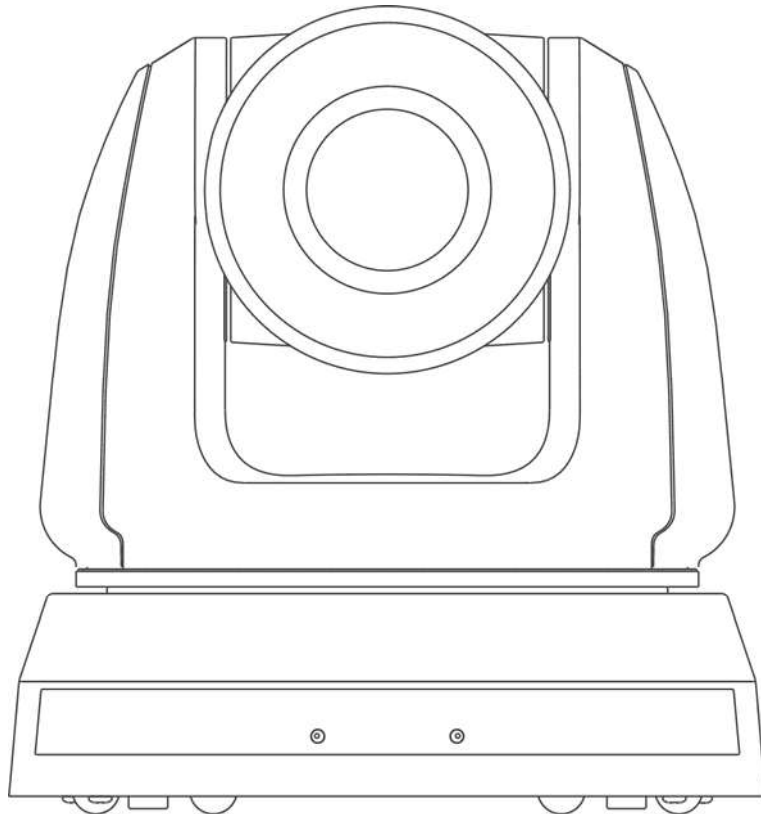

[Important]

To download the latest version of Quick Start Guide, multilingual user manual, software, or driver, etc., please visit Lumens
<http://www.MyLumens.com/>

Table of Contents

Copyright Information	2
Chapter 1 Safety Instructions	3
Chapter 2 Package Contents	5
Chapter 3 Product Overview	6
3.1 Overview	6
3.2 Description of LED indicator	6
Chapter 4 Instruction for installation	7
4.1 Preparation before installation	7
4.2 Instruction for installation	7
4.3 Connecting devices	13
Chapter 5 Remote Control and Setting Menu	17
5.1 Functions of remote control	17
5.2 Setting Menu	18
Chapter 6 Descriptions of Major Functions	24
6.1 I would like to switch to VC-A50P	24
6.2 I would like to save the current lens position data	24
6.3 I would like to clear the saved position data	24
6.4 I would like to turn on the back light compensation function	24
6.5 I would like to adjust the shooting angle of the lens	24
6.6 I would like to zoom in/out images	24
6.7 I would like to adjust the focal length	24
6.8 I would like to adjust the AF speed	24
6.9 I would like to set the image mode	25
6.10 I would like to freeze images	25
6.11 I would like to rotate the image	25
6.12 I would like to change the camera direction	25
6.13 I would like to display the current status	25
6.14 I would like to reset to the default value	25
Chapter 7 Network Function Settings Description	26
7.1 Web System Requirements	26
7.2 Online IP Camera	26
7.3 Web Page Function Description	29
Chapter 8 DIP switch setting	37
8.1 DIP SWITCH	37
8.2 RS-422 Connection	38
Chapter 9 Troubleshooting	40

Copyright Information

Copyrights © Lumens Digital Optics Inc. All rights reserved.

Lumens is a trademark that is currently being registered by Lumens Digital Optics Inc.

Copying, reproducing or transmitting this file is not allowed if a license is not provided by Lumens Digital Optics Inc. unless copying this file is for the purpose of backup after purchasing this product.

In order to keep improving the product, Lumens Digital Optics Inc. hereby reserves the right to make changes to product specifications without prior notice. The information in this file is subject to change without prior notice.

To fully explain or describe how this product should be used, this manual may refer to names of other products or companies without any intention of infringement.

Disclaimer of warranties: Lumens Digital Optics Inc. is neither responsible for any possible technological, editorial errors or omissions, nor responsible for any incidental or related damages arising from providing this file, using, or operating this product.

Chapter 1 Safety Instructions

Please use the product following the safety instructions below:

1 Operation

- 1.1 Please use the product in the recommended operating environment.
- 1.2 Do not place Light Engine in tilted position.
- 1.3 Do not place the product on an unstable trolley, stand or table.
- 1.4 Do not use this product near water or source of heat.
- 1.5 Use attachments only as recommended.
- 1.6 Use the type of power source indicated on the HD Camera. If you are not sure of the type of power available, consult your dealer or local electricity company for advice.
- 1.7 Always take the following precautions when handling the plug. Failure to do so may result in sparks or fire.
 - Ensure the plug is free of dust before inserting it into a socket.
 - Ensure that the plug is inserted into the socket securely.
- 1.8 Do not overload wall sockets, extension cords or multi-way plug boards to avoid potential risks.
- 1.9 Do not block slots and openings in the case of this product as poor ventilation may lead to overheating of this product.
- 1.10 Except as specifically instructed in this User Manual, do not attempt to open or remove covers by yourself. It may expose you to electric shock or other hazards. Refer all servicing to licensed service personnel.
- 1.11 Unplug this product from the wall outlet and refer servicing to licensed service personnel when the following situations happen:
 - If the power cords are damaged or frayed.
 - If liquid is spilled into the HD Camera or the HD Camera has been exposed to rain or water.

2 Installation

- 2.1 For security considerations, please make sure the standard hanging rack you bought is in line with UL or CE safety approbations and installed by technician personnel approved by agents.

3 Storage

- 3.1 Do not place the HD Camera where the cord can be stepped on as this may result in fraying or damage to the lead or the plug.
- 3.2 Never push objects of any kind through cabinet slots. Never allow liquid of any kind to spill into the HD Camera.
- 3.3 Unplug this product during thunderstorms or if it is not going to be used for an extended period.
- 3.4 Do not place this product or accessories on top of vibrating equipment or heated objects.

4 Cleaning

- 4.1 Unplug all the cables before cleaning. Use a damp cloth for cleaning. Do not use liquid or aerosol cleaners.





5 Remote control (if the accessories are equipped with remote control)

- 5.1 Using an incorrect battery type in the remote control may result in breakdown. Follow local instructions on how to dispose of used batteries.

■ Precautions

Warning: To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

If HD Camera will not be used for an extended time, unplug it from the power socket.

	<p>Note</p> <p>Risk of Electric Shock</p> <p>Please do not open it by yourself.</p>	
<p>Caution: To reduce the risk of electric shock, do not remove cover (or back). No user-serviceable parts inside. Refer servicing to licensed service personnel.</p>		
	<p>This symbol indicates that this equipment may contain dangerous voltage which could cause electric shock.</p>	
		<p>This symbol indicates that there are important operating and maintenance instructions in this User Manual with this unit.</p>

■ **FCC Warning**

This HD Camera has been tested and found to comply with the limits for a Class A digital device, pursuant to Article 15-J of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus as set out in the interference-causing equipment standard entitled "Digital Apparatus," ICES-003 of Industry Canada.

Cet appareil numérique respecte les limites de bruits radioélectriques applicables aux appareils numériques de Classe A prescrites dans la norme sur le matériel brouilleur: "Appareils Numériques," NMB-003 édictée par l'Industrie.

■ **EN55032 (CE Radiation) Warning**

Operation of this equipment in a residential environment could cause radio interference.

Chapter 2 Package Contents

VC-A50P



Instruction for installation




Remote Control




Power Cord



Power Adapter




RS-422 Connector




Appearance may vary depending on country/region

Metal Plate A



Metal Plate B






M3 Screws



Chapter 3 Product Overview

3.1 Overview
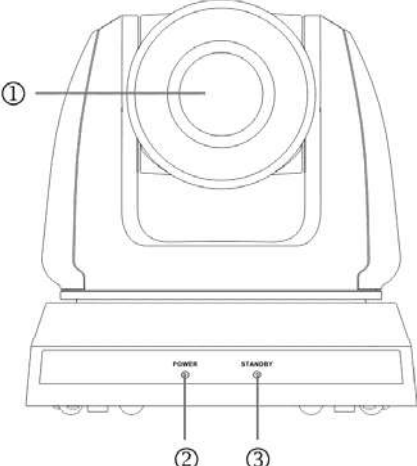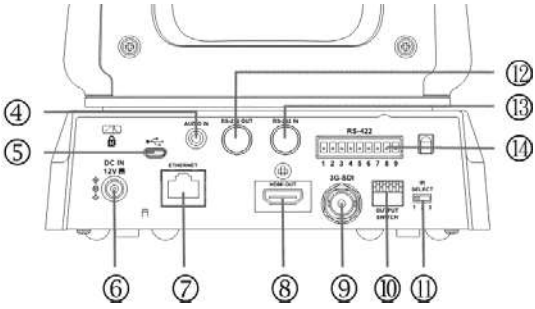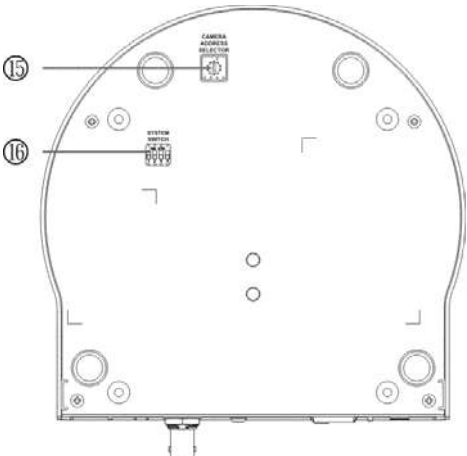
<p>Front View</p> 	<p>1. Camera lens</p> <p>2. Power LED indicator</p> <p>3. Standby LED indicator</p>
<p>Back View</p> 	<p>4. Audio In</p> <p>5. USB port (for FW update)</p> <p>6. Power input</p> <p>7. Network port (supporting IEEE 802.3at PoE+ power)</p> <p>8. HDMI Output</p> <p>9. 3G-SDI</p> <p>10. OUTPUT Switch</p>
<p>Bottom</p> 	<p>11. IR SELECT</p> <p>12. RS-232 output</p> <p>13. RS-232 input</p> <p>14. RS-422 Connection</p> <p>15. Camera Address Selectors</p> <p>16. SYSTEM Switch</p>

3.2 Description of LED indicator

Status	Power	Standby
Startup in progress	Green light	Orange light
In use	Green light	No indicator
In standby mode	No indicator	Orange light
Tally mode	Red light	Red light

Chapter 4 Instruction for installation

4.1 Preparation before installation

Installation and connection of VC-A50P HD camera requires special skills. To install by yourself, please follow necessary steps, ensure steady and tight installation of the device, and pay attention to your safety to avoid any accident.


- 4.1.1 **Ensure the safety of the installation environment. Please do not install the device on unstable ceiling or in a place where the device is in danger of falling to avoid any accident.**
- 4.1.2 **Please check whether accessories in the box are complete or not. Please contact the supplier for any shortage, and make sure to keep the accessories in the box intact.**
- 4.1.3 **Please choose a proper place for installation of VC-A50P in advance. Please determine an installation place according to the following requirements**
 - 4.1.1.1 Confirm the position for the object to be captured.
 - 4.1.1.2 Confirm whether the VC-A50P is set at a proper distance from other light sources.

4.2 Instruction for installation

4.2.1 I would like to install VC-A50P on the desk


4.2.1.1 Precautions for installation

- ◆ Please install the machine on a flat desk
- ◆ Do not grab the camera head by hand when handling the device
- ◆ Do not rotate the camera head by hand. Improper rotation may result in breakdown of the camera

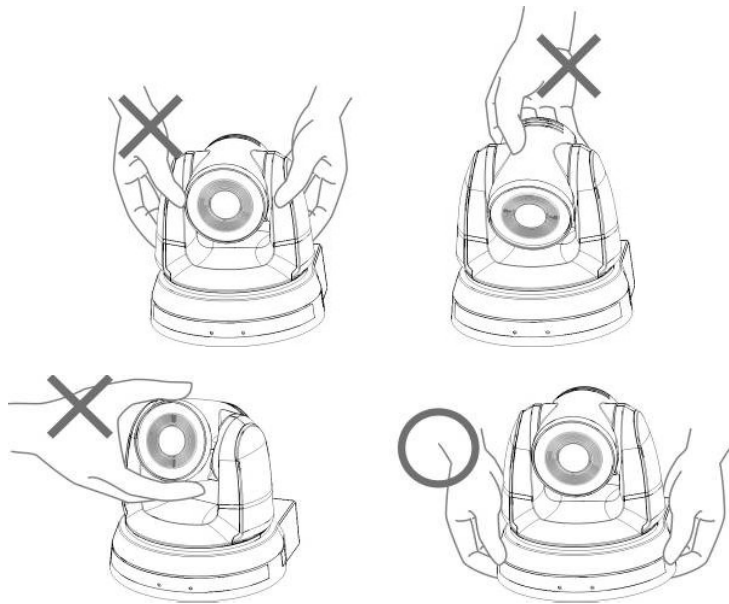

4.2.1.2 Installation steps

1. Please adjust DIP switch at first prior to installation
<Remark> Please refer to [Chapter 8 DIP Switch Setting](#) for the relevant descriptions on DIP switch.
2. Place the camera on a flat desk directly to ensure the normal vertical and horizontal operation of the machine

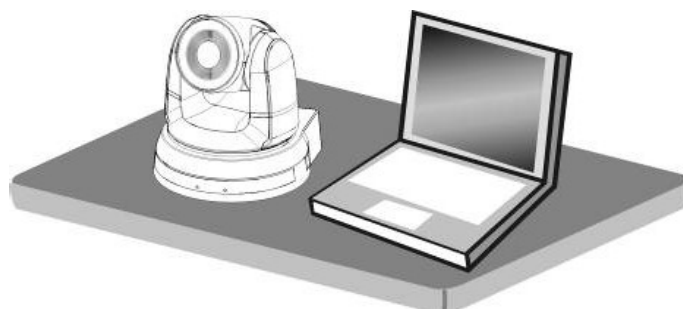

4.2.2 I would like to install VC-A50P on the ceiling


4.2.2.1 Prepare for the parts and equipment required during the installation

1. Accessories of VC-A50P in the box (metal plates A,B, M3 screw silver x 8, black x 2)
2. Screw for locking on ceiling mounted hanger x 4
3. Drilling machine, screw driver, ladder


4.2.2.2 Camera Size

Length x Width x Height : 174 x 186.2 x 185.5 mm

Weight : 1.8 Kg

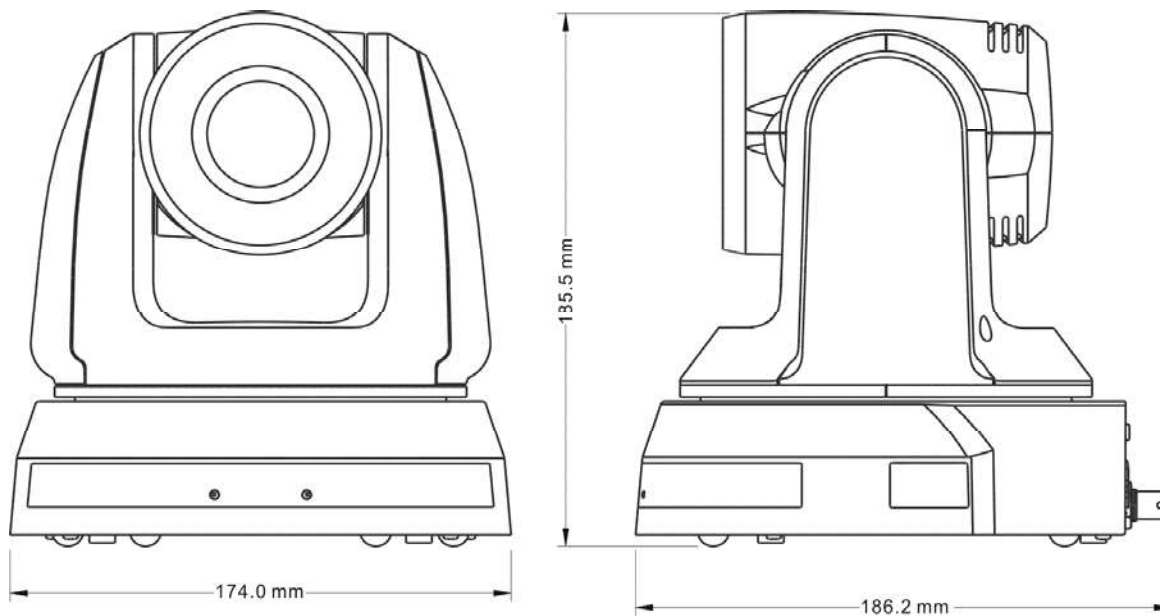


4.2.2.3 Max. rotation dimension of camera

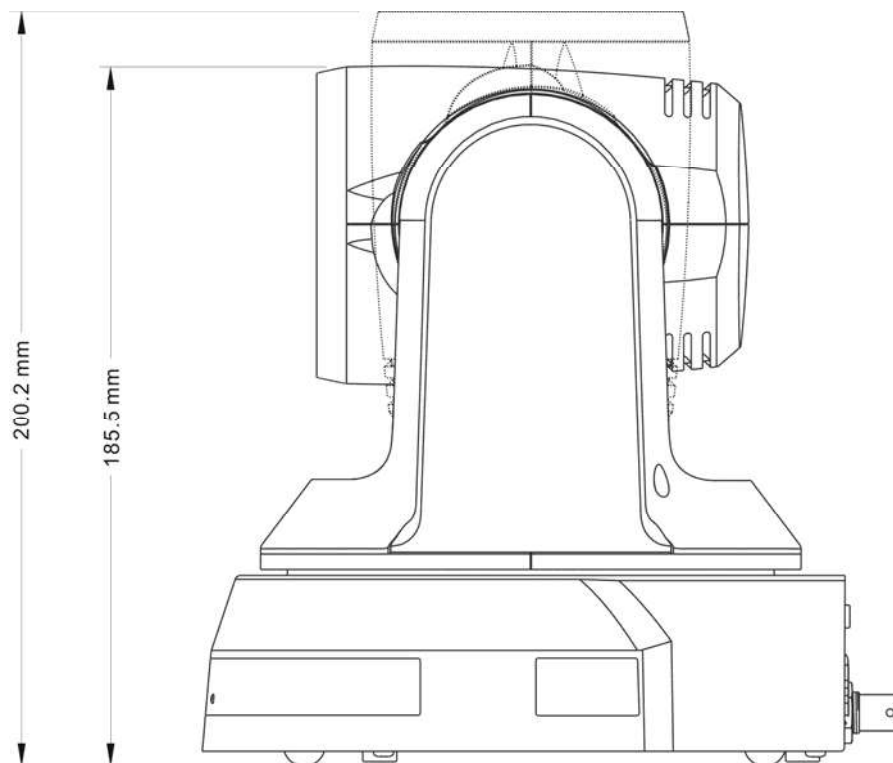


4.2.2.4 Size Diagram

1. Metal plate A - machine side

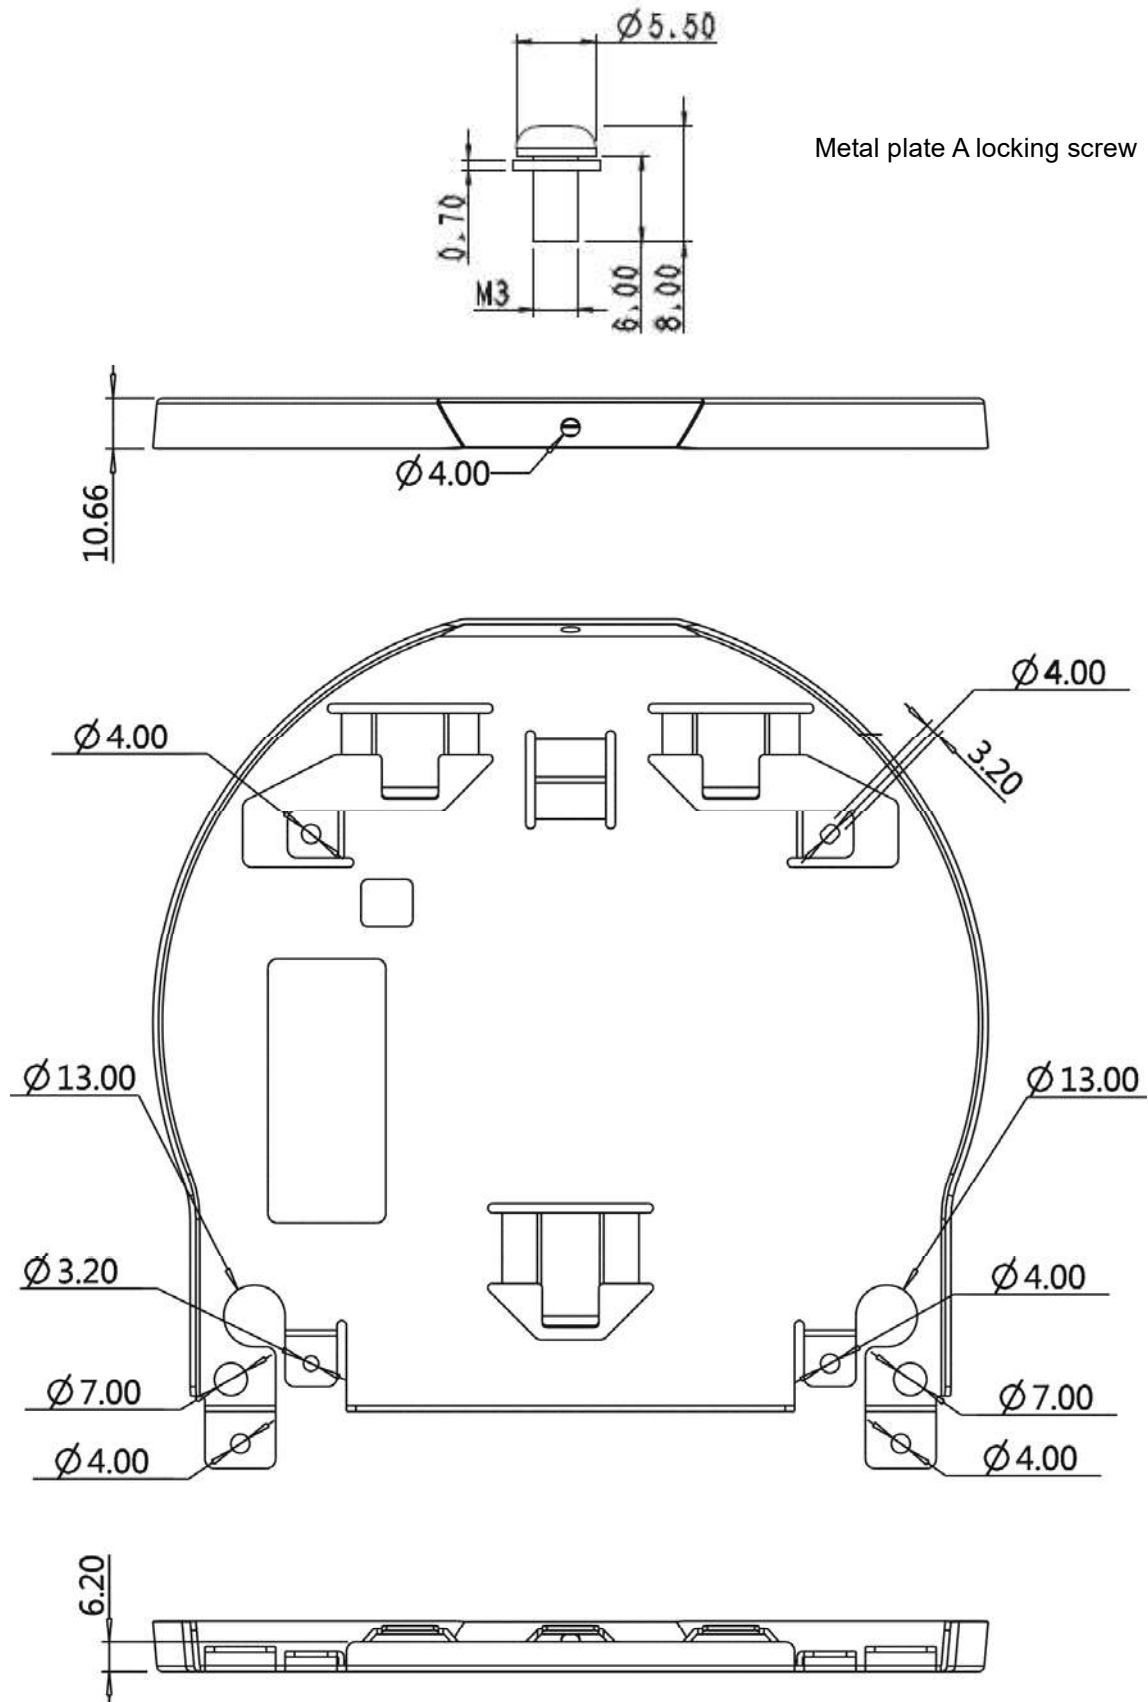


Metal plate A - machine side

2. Metal plate B - ceiling side

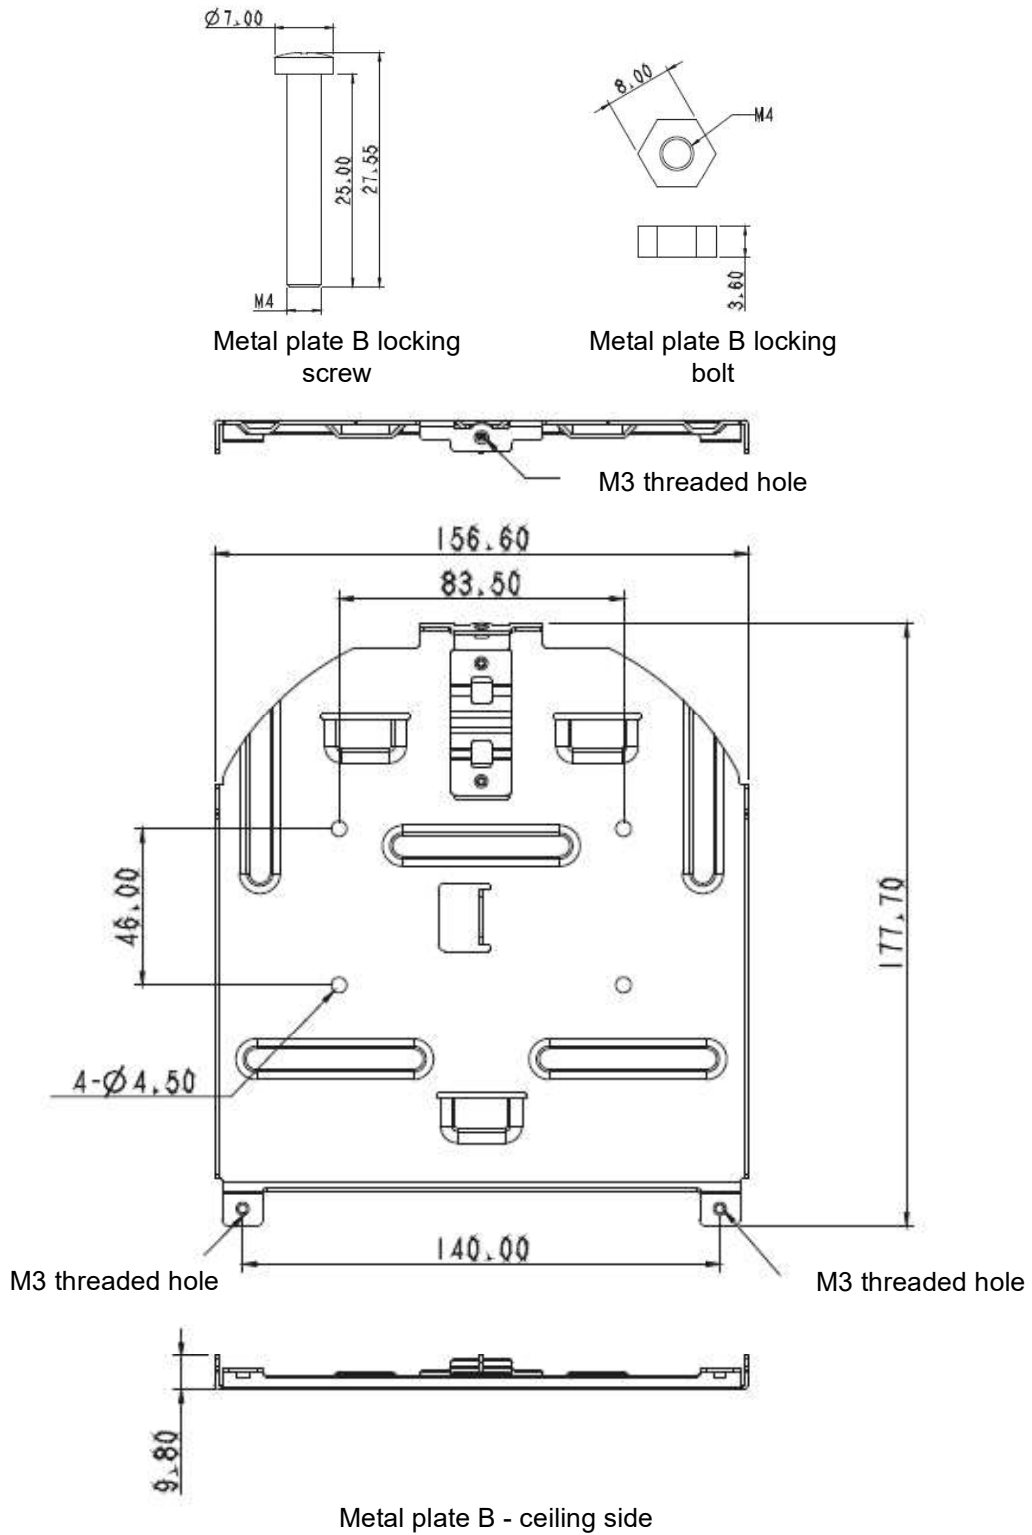


Metal plate B - ceiling side

3. Bottom of machine

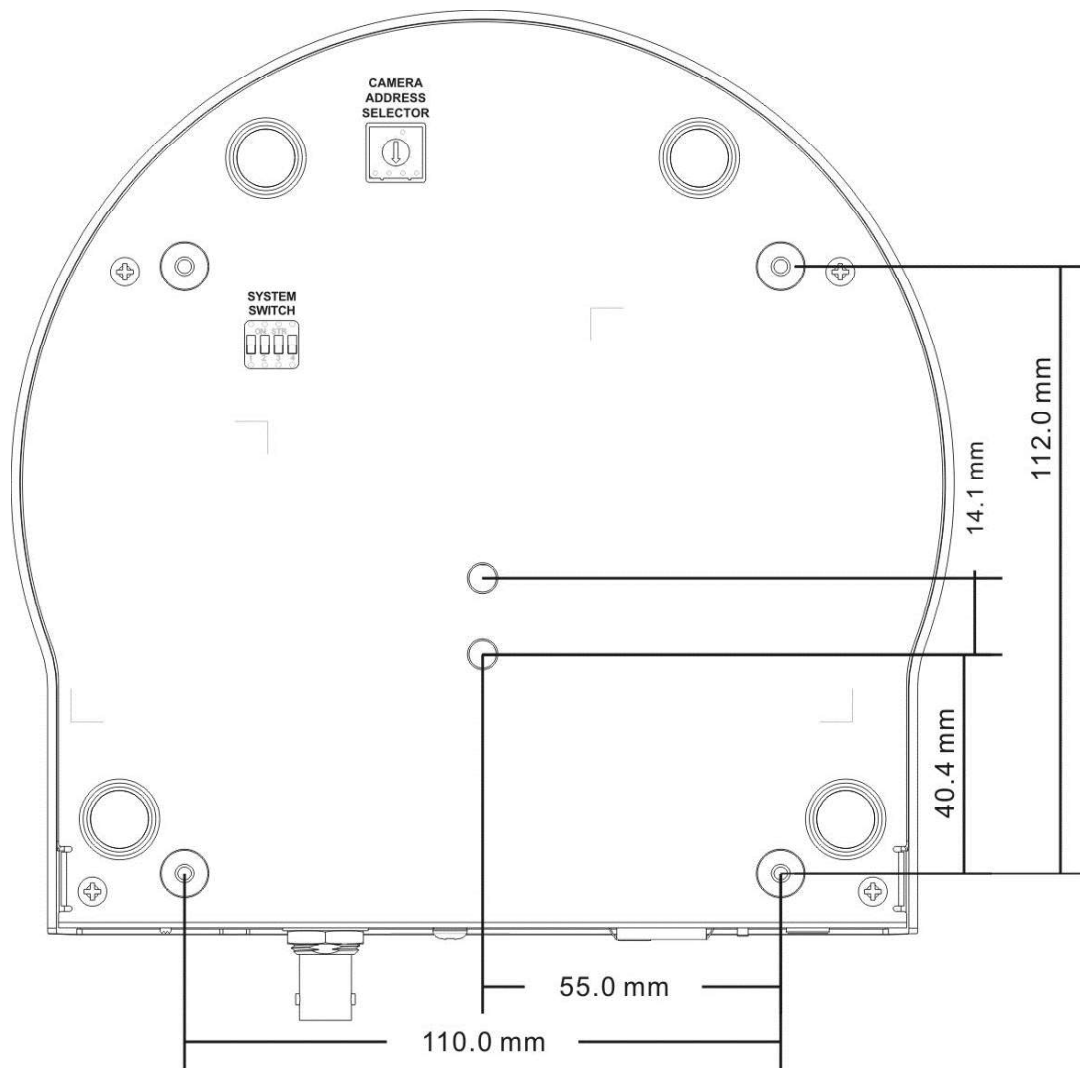

4.2.2.5 Precautions for installation

1. Before installation, please confirm the orientation of the machine relative to the object to be captured
2. It is recommended that the machine should be set at a distance of more than 1 meter away from the object to be captured. Please adjust for a best distance according to the magnification of the lens

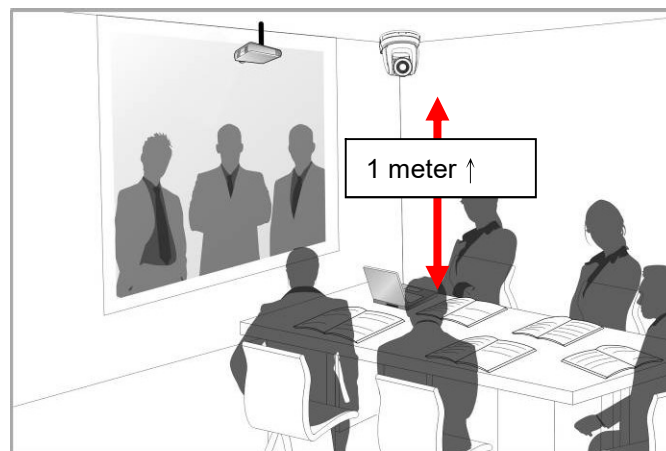


3. The machine (including metal plates) is weighed at about 2.5 kg. If it is to be installed on the ceiling, please use the hanger that has obtained UL security approval to prevent the machine from falling down.
4. Please check whether the camera is installed securely on a regular basis

4.2.2.6 Installation steps

1. Please adjust resolution on DIP switch at first

<Remark> Please refer to [Chapter 8 DIP Switch Setting](#) for the relevant descriptions on DIP switch.

2. Fix the metal plate A on the machine base with 4 M3 silver screws

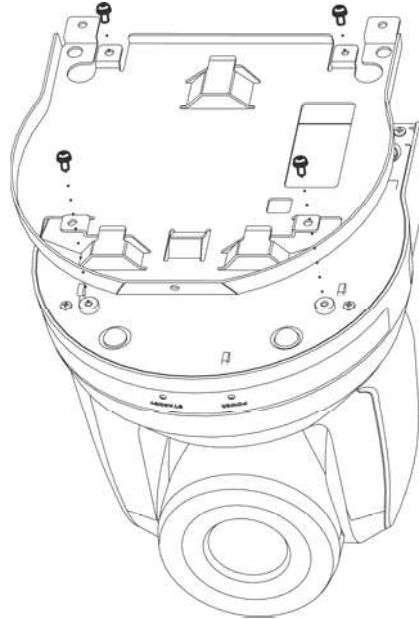


3. Lock the metal plate B on ceiling mounted hanger

※Caution:

- (1) Please use the hanger that has obtained UL security approval
- (2) Please reserve the hole for the connecting wires of the camera


4. Combine the metal plate A and the metal plate B

- (1) Push the metal plate A up to the ceiling and then to the right to latch the metal plate B
- (2) And then secure with 2 M3 silver screws and 1 M3 black screw

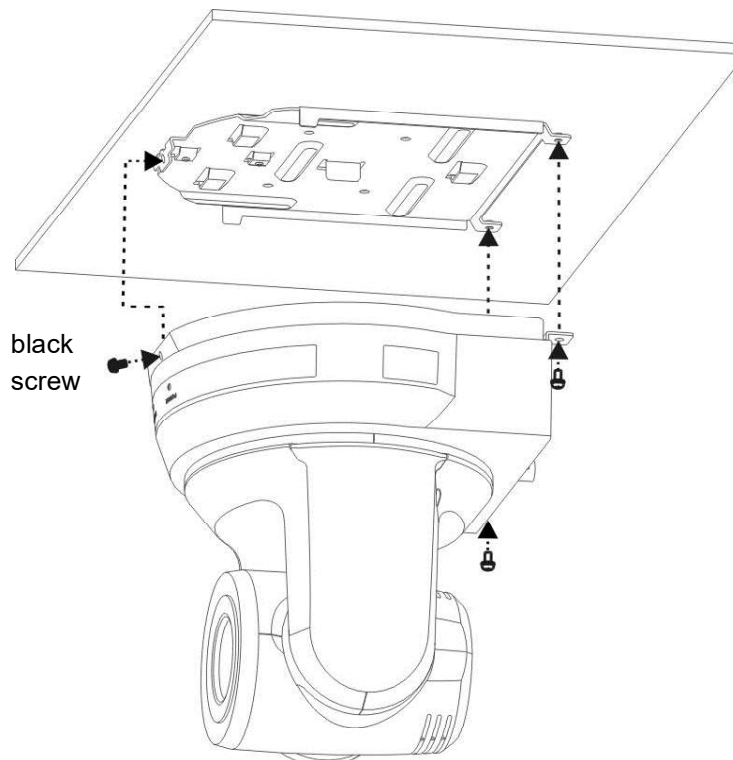

4.2.2.7 How to remove

1. Remove the connecting wires from the camera
2. Uninstall the camera together with the ceiling, loosen the three screws that fix the metal plates A and B and push to the left to remove the machine

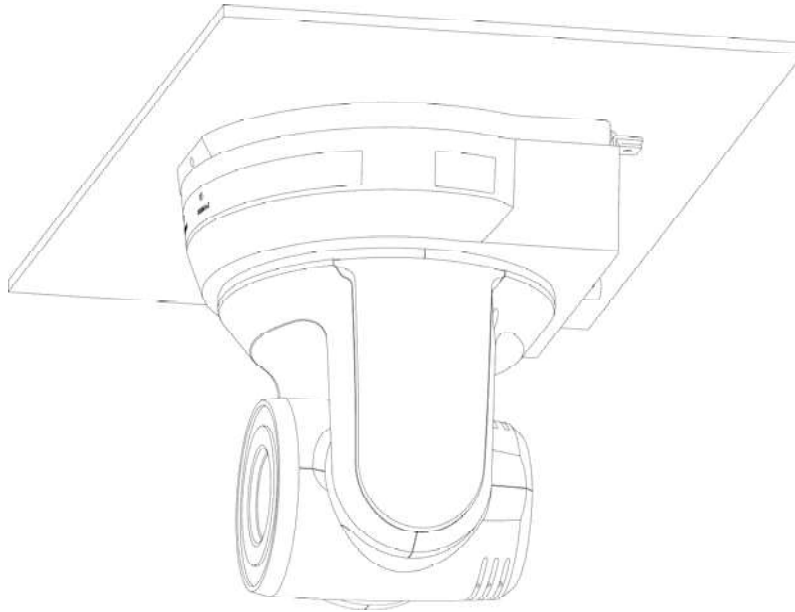


3. Then remove the screws on the hanger and the machine

4.3 Connecting devices


4.3.1 Image Output

4.3.1.1 Connecting to PC (video conference)

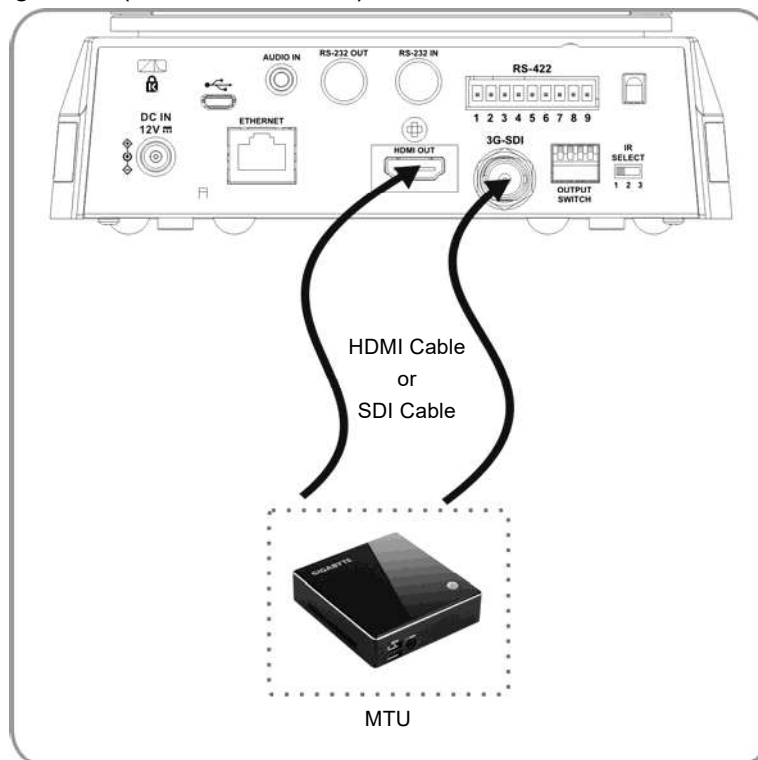


<Remark 1> SDI supports the audio output of 48 KHz only.

4.3.1.2 Connecting to an HDTV/computer monitor (HDMI)

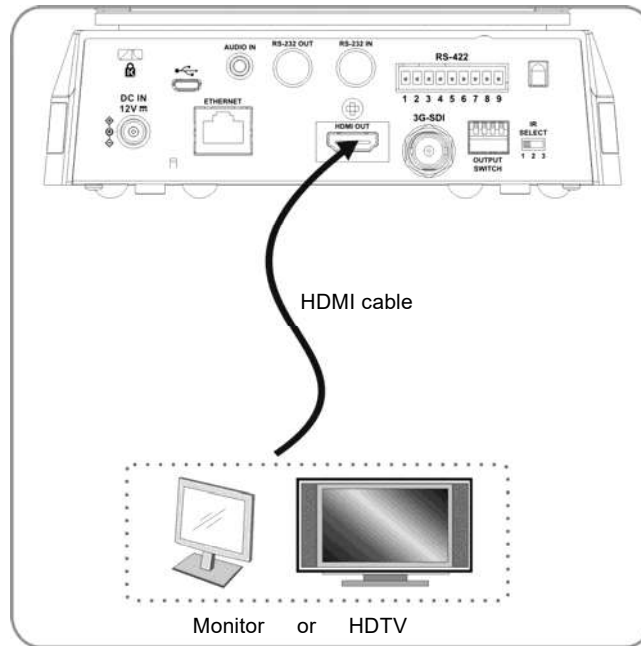

4.3.1.3 Connecting to Internet

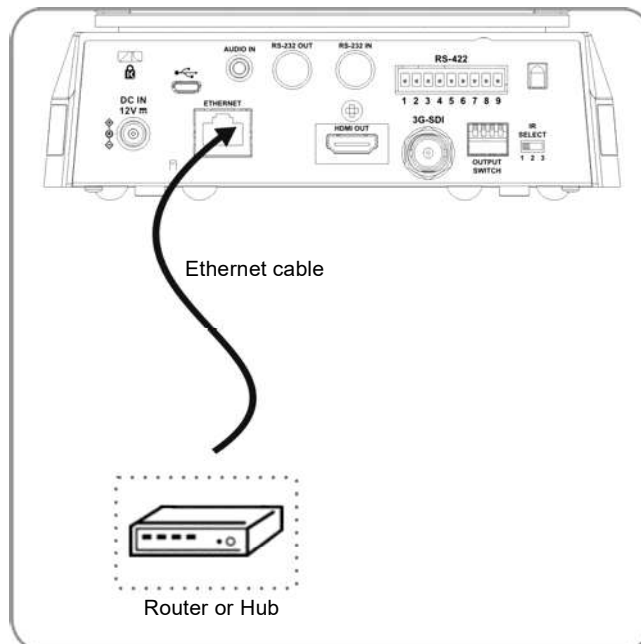


<Remark 1> VC-A50P can be used with browsers, Lumens VMS, VLC and QuickTime after it is connected to the Internet.

<Remark 2> For use of Lumens VMS, please refer to the User Manual for [VMS Software](#).

<Remark 3> VC-A50P supports PoE power supply when coupled with an IEEE 802.3at router or hub.

<Remark 4> For better performance, please use the ethernet cable of CAT 6 or above


4.3.1.4 Connecting AUDIO IN

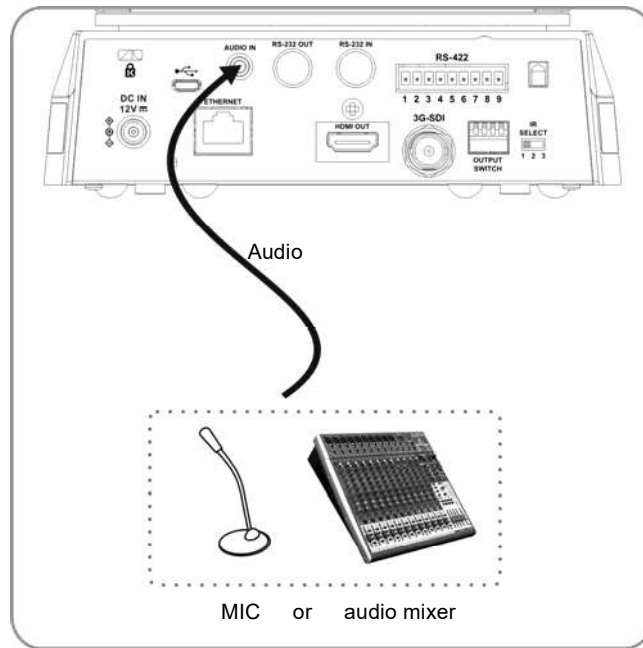

<Remark 1> Set the [Audio In] in the OSD to reflect the input device


4.3.2 Controlling VCs with the computer

4.3.2.1 Connecting to one computer for connection between VCs (RS-232 in/out)

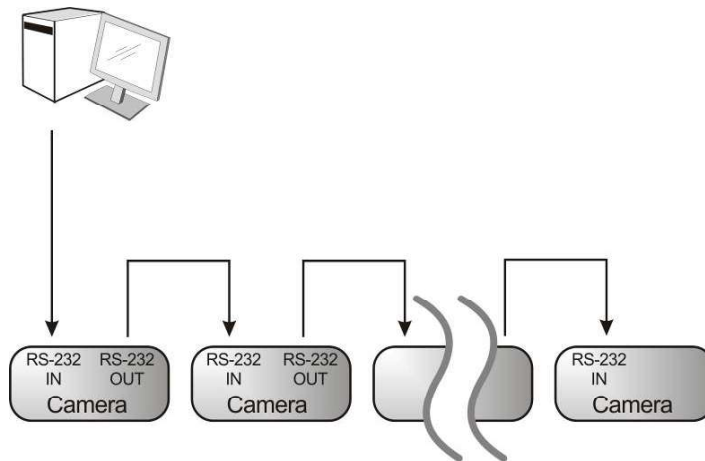

<Remark> With RS-232 in/out, at most 7 VCs can be connected.

4.3.2.2 Connecting to one computer for connection between VCs (RS-422)

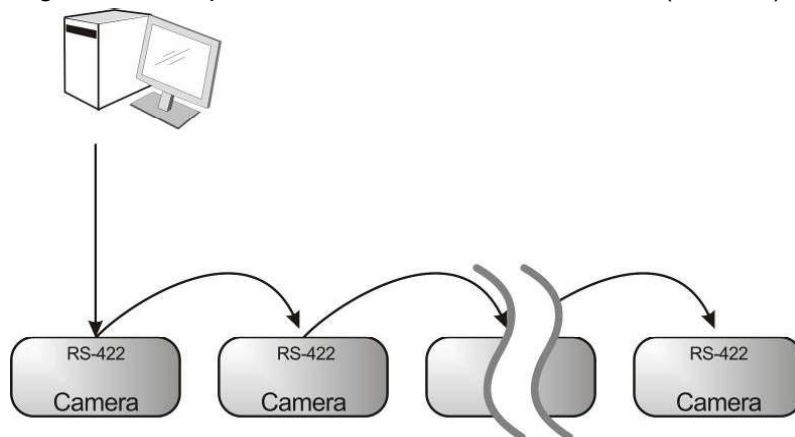

<Remark> Please refer to [8.2 RS-422 connection](#) for the RS-422 connection instructions.

<Remark> With RS-422, at most 7 VCs can be connected.

4.3.3 Use of VC-A50P with Internet Connection

4.3.3.1 Setup before use

- Connecting the screen through HDMI output.
- Press [MENU] on the Remote Control to display the OSD menu.
- Shift down to [Ethernet] to modify and confirm the IP address
DHCP: Enable/disable the dynamic host configuration protocol
IP Address: Confirm or modify the IP address of VC-A50P
Subnet mask: 255.255.255.0
Gateway: Preset 192.168.100.254

[Remark] Please modify the above settings based on the LAN setting of the operating environment. To use DHCP, please connect the VC-A50P to LAN and then confirm IP address.

- After completing settings, press [MENU] to exit the OSD menu.
- After completing setting and confirming IP address, HDMI cable can be disconnected.

4.3.3.2 Start Using

- Connect network cable to VC-A50P network port to connect VC-A50P to LAN.
- Press [MENU] on the Remote Control to display the OSD menu.
- Open the browser, and enter the URL of VC-A50P in the address bar,
e.g.: <http://192.168.100.150> (default IP address)
- Enter administrator's account and password
Account: admin (Default)
Password: 9999 (Default)
Subnet mask: 255.255.255.0
Gateway: Preset 192.168.100.254

[Remark 1] For details, please refer to [Chapter 7 Network Function Settings Description](#).


[Remark 2] In addition to browsers, other software such as Lumens VMS, VLC and QuickTime can be used for operation.

[Remark 3] For operation of Lumens VMS, please download the software and its user manual from Lumens website

Chapter 5 Remote Control and Setting Menu

5.1 Functions of remote control

<Remark> The below functions are listed alphabetically.

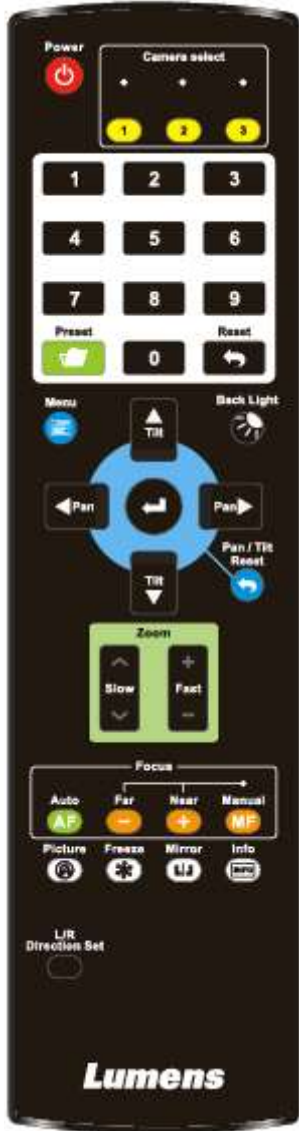	Item	Description
	◀, ▶, ▲, ▼	Move the lens
	Back Light	Turn on/off back light compensation
	Camera select	Choose 1 ~ 3 of VC-A50P
	Focus-Manual / Far/Near	Turn on manual focus to adjust the focal length
	Focus-Auto	Auto focus
	Freeze	Freeze the screen
	Home-Enter	Go back to the main page / Execute
	Info	Status information
	L/R Direction Set	L/R Direction / Normal
	Menu	Display OSD menu
	Mirror	Rotate the image (OFF / Mirror / Flip / Rotate)
	Pan/Tilt Reset	Clear the Pan / Tilt setting
	Picture	Switch image effect (OFF / NEG / Black & White)
	Power	Power Switch
	Preset	Appoint an ID (0 ~ 9) to save the current position data
	Reset	Appoint an ID (0 ~ 9) to delete the current position data
	Zoom-Fast	Adjust image size
	Zoom-Slow	Fine-tune image size

5.2 Setting Menu

<Remark> Press [Menu] on the **remote control** to enter the setting menu; the **bold underlined** values in the following table are defaults.

1st Level Major Items	2nd Level Minor Items	3rd Level Adjustment Values		Function Descriptions	
Exposure	Mode	1. Full Auto 2. Shutter Pri 3. Iris Pri 4. Manual 5. White Board 6. Smooth Auto		Exposure mode setting	
	Exposure Comp.	On / Off		AE Level	
	Exposure Comp. Level	-6~ 0 ~5		The value can be adjusted only after Exposure Comp. is activated	
	Shutter Pri		60/30 mode	50/25 mode	Shutter priority setting
			1/10000	1/10000	
			1/5000	1/5000	
			1/3000	1/3000	
			1/2500	1/2500	
			1/2000	1/1750	
			1/1500	1/1250	
			1/1000	1/1000	
			1/725	1/600	
			1/500	1/425	
			1/350	1/300	
			1/250	1/215	
1/180			1/150		
1/120			1/120		
1/100	1/100				
1/90	1/75				
		1/60	1/50		
		1/30	1/25		
		1/15	1/12		
		1/8	1/6		
		1/4	1/3		
		1/2	1/2		
		1/1	1/1		

	Iris Pri	<ol style="list-style-type: none"> 1. <u>F1.6</u> 2. F2 3. F2.2 4. F2.7 5. F3.2 6. F3.8 7. F4.5 8. F5.4 9. F6.3 10. F7.8 11. F9 12. F11 13. F13 14. F16 15. F18 	Iris setting																																								
	Manual Gain	<ol style="list-style-type: none"> 1. <u>0dB</u> 2. 2 dB 3. 4 dB 4. 6 dB 5. 8 dB 6. 10 dB 7. 12 dB 8. 14 dB 9. 16 dB 10. 18 dB 11. 20 dB 12. 22dB 13. 24dB 14. 26 dB 15. 28 dB 16. 30 dB 	Manually set the gain																																								
	Manual Speed	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">60/30 mode</td> <td style="text-align: center;">50/25 mode</td> </tr> <tr><td style="text-align: center;">1/10000</td><td style="text-align: center;">1/10000</td></tr> <tr><td style="text-align: center;">1/5000</td><td style="text-align: center;">1/5000</td></tr> <tr><td style="text-align: center;">1/3000</td><td style="text-align: center;">1/3000</td></tr> <tr><td style="text-align: center;">1/2500</td><td style="text-align: center;">1/2500</td></tr> <tr><td style="text-align: center;">1/2000</td><td style="text-align: center;">1/1750</td></tr> <tr><td style="text-align: center;">1/1500</td><td style="text-align: center;">1/1250</td></tr> <tr><td style="text-align: center;">1/1000</td><td style="text-align: center;">1/1000</td></tr> <tr><td style="text-align: center;">1/725</td><td style="text-align: center;">1/600</td></tr> <tr><td style="text-align: center;">1/500</td><td style="text-align: center;">1/425</td></tr> <tr><td style="text-align: center;">1/350</td><td style="text-align: center;">1/300</td></tr> <tr><td style="text-align: center;">1/250</td><td style="text-align: center;">1/215</td></tr> <tr><td style="text-align: center;">1/180</td><td style="text-align: center;">1/150</td></tr> <tr><td style="text-align: center;">1/120</td><td style="text-align: center;">1/120</td></tr> <tr><td style="text-align: center;">1/100</td><td style="text-align: center;">1/100</td></tr> <tr><td style="text-align: center;">1/90</td><td style="text-align: center;">1/75</td></tr> <tr><td style="text-align: center;"><u>1/60</u></td><td style="text-align: center;"><u>1/50</u></td></tr> <tr><td style="text-align: center;">1/30</td><td style="text-align: center;">1/25</td></tr> <tr><td style="text-align: center;">1/15</td><td style="text-align: center;">1/12</td></tr> <tr><td style="text-align: center;">1/8</td><td style="text-align: center;">1/6</td></tr> </table>	60/30 mode	50/25 mode	1/10000	1/10000	1/5000	1/5000	1/3000	1/3000	1/2500	1/2500	1/2000	1/1750	1/1500	1/1250	1/1000	1/1000	1/725	1/600	1/500	1/425	1/350	1/300	1/250	1/215	1/180	1/150	1/120	1/120	1/100	1/100	1/90	1/75	<u>1/60</u>	<u>1/50</u>	1/30	1/25	1/15	1/12	1/8	1/6	Manually set the shutter
60/30 mode	50/25 mode																																										
1/10000	1/10000																																										
1/5000	1/5000																																										
1/3000	1/3000																																										
1/2500	1/2500																																										
1/2000	1/1750																																										
1/1500	1/1250																																										
1/1000	1/1000																																										
1/725	1/600																																										
1/500	1/425																																										
1/350	1/300																																										
1/250	1/215																																										
1/180	1/150																																										
1/120	1/120																																										
1/100	1/100																																										
1/90	1/75																																										
<u>1/60</u>	<u>1/50</u>																																										
1/30	1/25																																										
1/15	1/12																																										
1/8	1/6																																										

		1/4	1/3	
		1/2	1/2	
		1/1	1/1	
	Manual Iris	<ol style="list-style-type: none"> 1. <u>F1.6</u> 2. F2 3. F2.2 4. F2.7 5. F3.2 6. F3.8 7. F4.5 8. F5.4 9. F6.3 10. F7.8 11. F9 12. F11 13. F13 14. F16 15. F18 		Manually set the iris
	Gain Limit	<ol style="list-style-type: none"> 1. 8 dB 2. 10 dB 3. 12 dB 4. 14 dB 5. 16 dB 6. 18 dB 7. <u>20 dB</u> 		Max. limit value of electron gain
	Iris Limit	<ol style="list-style-type: none"> 1. F1.6 2. <u>F2.2</u> 3. F3.2 4. F4.5 5. F6.3 6. F9 7. F13 8. F18 		Max. limit value of iris
	WDR	<ol style="list-style-type: none"> 1. <u>Off</u> 2. 1 3. 2 4. 3 5. 4 6. 5 		WDR settings
White Balance	Mode	<ol style="list-style-type: none"> 1. <u>Auto</u> 2. Indoor 3. Outdoor 4. One Push WB 5. ATW 6. Manual 7. Sodium Lamp 8. 3000K 9. 4300K 10. 5000K 11. 6500K 12. 8000K 13. WideAuto 		Select the color temperature mode <ol style="list-style-type: none"> 1. 4000k ~ 7000k 2. 3200k 3. 5800k 4. 1700k ~ 10000k 5. 1700k ~ 10000k 6. Custom 7. 2800k 8. 3000K 9. 4300K 10. 5000K 11. 6500K 12. 8000K 13. 3000k ~ 7000k

	One Push Trigger	<u>ENTER</u>	One push trigger
	Manual Red	0~ <u>C</u> ~128	Adjustable when the white balance mode is set to Manual
	Manual Blue	0~ <u>C</u> ~128	Adjustable when the white balance mode is set to Manual
Picture	Picture effect	1. <u>Off</u> 2. Neg 3. B & W	Set the picture effect
	Sharpness	0~ <u>C</u> ~15	Adjust the sharpness of the image
	2D NR	1. <u>Auto</u> 2. Off 3. 1 4. 2 5. 3 6. 4 7. 5	2D noise reduction settings
	3D NR	1. Off 2. Low 3. <u>Typ</u> 4. Max 5. Auto	3D dynamic noise reduction settings
	Image Mode	1. Mode 1 2. <u>Mode 2</u> 3. Mode 3 4. Mode 4 5. Mode 5 6. Mode 6 7. Custom	The user may customize his/her desired image mode.
	Image Mode Load	1. Mode 1 2. Mode 2 3. Mode 3 4. <u>Mode 4</u> 5. Mode 5 6. Mode 6	Adjustable when the image mode is set to Custom . After selected, the corresponding image mode parameters will be read and applied to Custom
	Brightness	0~ <u>C</u> ~25	Adjustable when the image mode is set to Custom
	Contrast	0~ <u>C</u> ~25	Contrast adjustment; Adjustable when the image mode is set to Custom
	Saturation	0~ <u>C</u> ~25	Adjustable in the Custom Mode
	Black Level	1. <u>Off</u> 2. Type 1 3. Type 2 4. Type 3 5. Type 4 6. Type 5	Adjustable in the Custom Mode
	Gamma	0~ <u>C</u> ~3	Adjustable in the Custom Mode
	Skin Tone	0~ <u>C</u> ~5	Skin tone setting, adjustable in the Custom Mode
	Pan Tilt Zoom	Pan/Tilt Limit	ON/ <u>Off</u>
Pan Right Limit		0~ <u>170</u>	Limit the right angle

	Pan Left Limit	<u>-170</u>~0	Limit the left angle
	Tilt UP Limit	0~ <u>90</u>	Limit the upward angle
	Tilt Down Limit	<u>-30</u>~0	Limit the downward angle
	Pan Flip	On/ <u>Off</u>	Activate the reverse Pan command
	Tilt Flip	On/ <u>Off</u>	Activate the reverse Tilt command
	Preset Speed	1. 5 per second 2. 25 per second 3. 50 per second 4. <u>120 per second</u>	Set the rotation speed of the cradle head when Preset is executed
	PTZ Speed Comp	On/ <u>Off</u>	PTZ Speed Compensation
	Zoom Limit	x1 ~ <u>x20</u>	Optical zoom limit
Dig-Effect	Mirror	1. <u>Off</u> 2. <u>Mirror</u> 3. <u>Flip</u> 4. <u>Mirror + Flip</u>	Set the mode at which the image is turned
Auto Focus	AF Sensitivity	1. Low 2. <u>Middle</u> 3. High	Select the AF triggering speed. The higher the speed is, the faster AF is triggered
	AF speed	Fast / <u>Normal</u>	Focus speed after AF triggering
	AF Frame	<u>Full Frame</u> /Center	AF frame setting, when central area was set as AF frame, focusing will be on the center of the screen. When Full Frame was set as AF frame, focusing will be calculated based on the full screen
	Zoom Tracking	<u>On</u> / Off	Turn on/off zoom tracking
Ethernet	DHCP	<u>On</u> / Off	Enable/Disable DHCP setting using left and right arrow keys and press [ENTER] to apply setting.
	IP Address	<u>192.168.100.150</u>	Press [ENTER] to modify the items; select the item to be modified using left and right arrow keys, and modify the value using numeric keys.
	Subnet mask	<u>255.255.255.0</u>	Press [ENTER] to modify the items; select the item to be modified using left and right arrow keys, and modify the value using numeric keys.
	Gateway	<u>192.168.100.254</u>	Press [ENTER] to modify the items; select the item to be modified using left and right arrow keys, and modify the value using numeric keys.
Audio	Audio In	<u>Line In</u> /Mic In	Set Audio In
	Audio Enable	On / <u>Off</u>	Turn on/off audio output
	Audio Volume	0~ <u>C</u> ~10	Volume Setting
	Audio Delay	0 ~ 500 ms/ <u>Off</u>	Set audio delay
	Encode Sample Rate	1. <u>48 KHz (AAC)</u> 2. 44.1 KHz (AAC) 3. 16 KHz (G.711) 4. 8 KHz (G.711)	Set the encode type and sample rate SDI supports the audio output of 48 KHz only.

System	Prompt	On / Off	Turn on/off the prompt information on the display
	IR Receive	On / Off	Turn on/off the infrared reception
	Motionless Preset	On / Off	When the function is enabled, the screen will Freeze when Preset is executed. Freeze will be released after Preset is completed.
	Tally Lamp	Enable / Disable	Turn on/off the Tally Mode
	Language	English / Chinese	Language
	Initial position	Last MEM / 1st Preset	
	Output Mode	<ol style="list-style-type: none"> 1. 1080p/60 2. 1080p/59.94 3. 1080p/50 4. 1080p/30 5. 1080p/29.97 6. 1080p/25 7. 1080i/60 8. 1080i/59.94 9. 1080i/50 10. 720p/60 11. 720p/59.94 12. 720p/50 	Set output resolution
	Control Device	Encoder / Controller	Control Device setting Controller: Used as a joystick Encoder: Used for tracking system
	Protocol	Protocol V / Protocol PD	Protocol V: VISCA Protocol PD: PELCO D
	PD Address	1~ C ~255	The Protocol set to PD allows the camera ID address to be assigned
	Factory Reset	On / Off	Resume the factory default setting
	FW Upgrade	On / Off	Upgrade Firmware
Status			Display the current setting status

Chapter 6 Descriptions of Major Functions

6.1 I would like to switch to VC-A50P

1. Press [**Camera 1 ~ 3**] on the **remote control** to select VC-A50P.
 - **Camera 1 ~ 3** is selected with **IR SELECT**.

6.2 I would like to save the current lens position data

1. Hold [**Preset + ID**] on the **remote control** to save the current position data.
 - **ID** shall be a digit [**0 ~ 9**].
 - Use **VISCA Command** to store position data to [**0 ~ 127**]

6.3 I would like to clear the saved position data

1. Hold [**Reset + ID**] on the **remote control** to clear the given position data.
 - **ID** shall be a digit [**0 ~ 9**].
 - Use **VISCA command** to clear position data stored in [**0 ~ 127**]

6.4 I would like to turn on the back light compensation function

1. Press [**Back Light**] on the **remote control** to turn on or turn off the back light compensation

6.5 I would like to adjust the shooting angle of the lens

1. Press [**Tilt ▲**] or [**Tilt ▼**] on the **remote control** to adjust the angle upward or downward.
2. Press [**Pan ►**] or [**Pan ◀**] on the **remote control** to adjust the angle to right or left.
3. Press [**Pan - Tilt Reset**] on the **remote control** to reset the angle to the center point.

6.6 I would like to zoom in/out images

6.6.1 Adjust image size

1. Press [**Fast +**] on the **remote control** to zoom in images.
2. Press [**Fast -**] on the **remote control** to zoom out images.

6.6.2 Fine-tune image size

1. Press [**Slow +**] on the **remote control** to zoom in images.
2. Press [**Slow -**] on the **remote control** to zoom out images.

6.7 I would like to adjust the focal length

6.7.1 Auto tune

1. Press [**AF**] on the **remote control** to adjust automatically.

6.7.2 Manual focus

1. Press [**MF**] on the **remote control** to turn on the manual focus function.
2. Press **Focus - [+]** or **Focus - [-]** to adjust.

6.8 I would like to adjust the AF speed

6.8.1 Adjust the AF Sensitivity

Triggering speed of focus. The higher the speed is, the faster focus is triggered

To shoot fast-moving objects, **AF Sensitivity** can be set to [**High**] or [**Medium**], which is applicable

to quick focus.

When the environment is too dark to enable auto focus or fixed objects have to be shot in different brightness, **AF Sensitivity** can be set to **[Low]**.

1. Press [MENU] to activate the setting menu.
2. Press [▶] or [◀] to select [Auto Focus].
3. Press [ENTER] to activate.
4. Press [▲] or [▼] to select [AF Sensitivity].
5. Press [ENTER] to activate.
6. Press [▶] or [◀] to select [High / Middle / Low].
7. Press [MENU] to exit.

6.8.2 Adjust the AF speed

The focus speed upon triggering **AF Sensitivity**

- **[Normal]** (default): Image flickering may not occur
 - **[Fast]**: Fast focus speed
1. Press [MENU] to activate the setting menu.
 2. Press [▶] or [◀] to select [Auto Focus].
 3. Press [ENTER] to activate.
 4. Press [▲] or [▼] to select [AF speed].
 5. Press [ENTER] to activate.
 6. Press [▶] or [◀] to select [Fast / Normal].
 7. Press [MENU] to exit.

6.9 I would like to set the image mode

1. Press [Picture] on the **remote control** to switch [Off / Neg / B&W].

6.10 I would like to freeze images

1. Press [Freeze] on the **remote control** to freeze the current image on the display.

6.11 I would like to rotate the image

1. Press [Mirror] on the **remote control** to switch [Off / Mirror / Flip / Mirror + Flip].

6.12 I would like to change the camera direction

1. Press [L/R Direction Set] on the **remote control** to switch [L/R Direction / Normal].

6.13 I would like to display the current status

1. Press [Info] on the **remote control** to display the current status information. `

6.14 I would like to reset to the default value

Reset to default value using OSD menu or Remote Control combination key

- **OSD menu:** Press [MENU] → [System] → [Factory Reset] → [On] → [Enter] on the Remote Control and reset to the default value
- **Remote Control combination key:** press [+] → [8] → [8] → [6] → [Enter] one by one on the Remote Control in order to reset to the default value

Chapter 7 Network Function Settings Description

7.1 Web System Requirements


Web Browser: Internet Explorer 8 ~ 11

7.2 Online IP Camera

7.2.1 Connecting to Internet


Two common connection methods are shown below

1. Connecting via switch or router

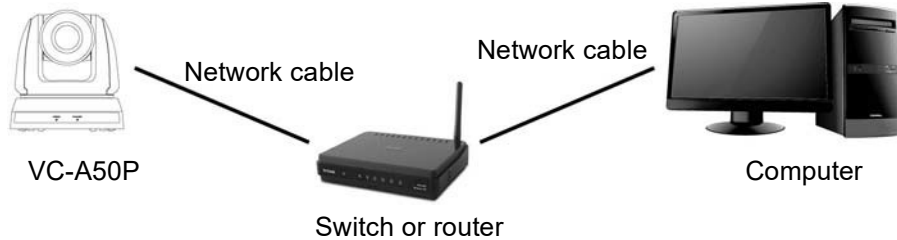


2. To connect directly through network cable, the IP address of the computer should be changed so that it is on the same network segment as the camera; for instance 192.168.100.x (preset for camera)

- Connection diagram

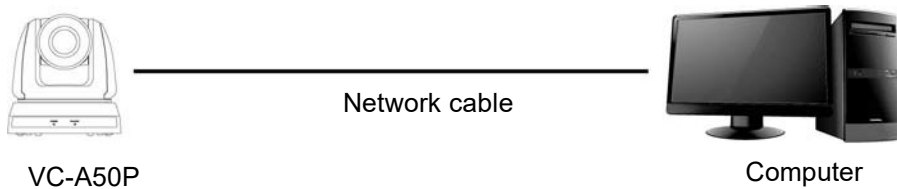

- Change network settings

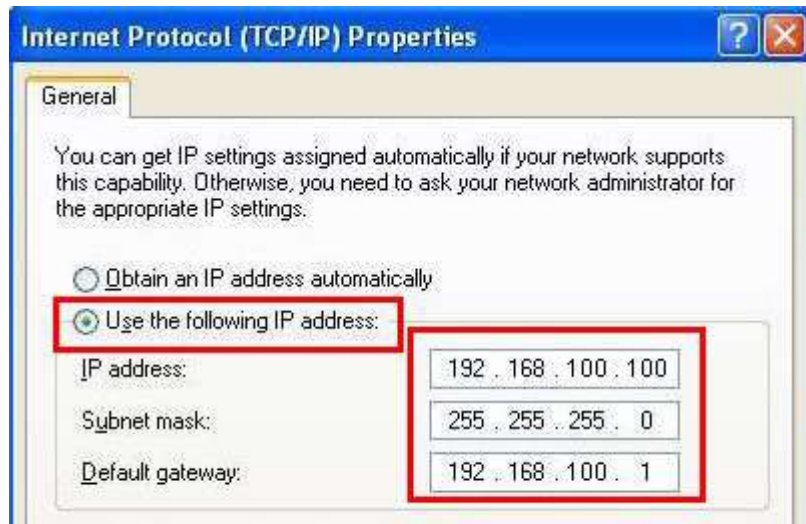

7.2.2 Use the web browser

1. Open the IE browser, and enter the URL of VC-A50P in the address bar, such as: <http://192.168.100.150> (default IP address)
2. Enter administrator's account and password to get started
Account: admin (Default)
Password: 9999 (Default)

<Remark> 1. "WebPlugin" must be installed before the first use. Please install the program after downloading according to instructions on the screen (as shown in the following figure)
2. Please login the computer as Administrator to install it
3. After completing installation, please refresh the page.

Installation Guide

The "WebPlugin" file will be downloaded automatically in 7 seconds...

Step:

- 1. Before you begin, close your web browser (i.e. Internet Explorer, Firefox, Chrome, etc.) first.




- 2. Double-click "WebPlugin.exe" to start the actual installation process.




- 3. After installation is completed, open the web browser and type in the IP address of the IP Camera



7.2.3 Use VMS

1. Please download VMS software from Lumens website: <http://www.MyLumens.com/support.php>
2. After starting the software, use search function  to find out available VC-A50P, or add a known VC-A50P IP address
3. Click VC-A50P in the list and start operation after connecting to network

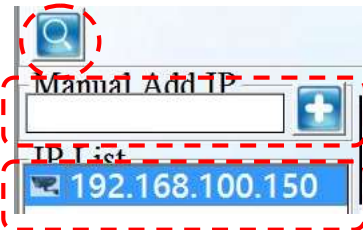


7.2.4 Use RTSP player

In addition to browser and VMS, other RTSP methods can be used for connection, such as VLC and Quick Time

RTSP connection address:


- RTSP main stream (h264) => <rtsp://VC IP Address:8557/h264>
- RTSP second stream (h264) => <rtsp://VC IP Address:8556/h264>
- RTSP second stream (MJPEG) or single stream in MJPEG => <rtsp://VC IP Address:8555/mjpeg>

1. Open the software to enter URL: <rtsp://192.168.100.150:8557/h264>

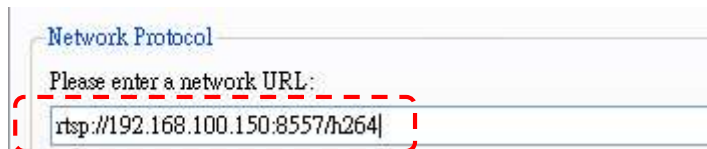

7.2.5 Use RTMP connection


Support RTMP connection. If RTMP server is set up, RTMP connection function can also be opened. Please log into VC-A50P webpage to change RTMP of network setting as described in [7.2.2 Use the Web Browser](#)

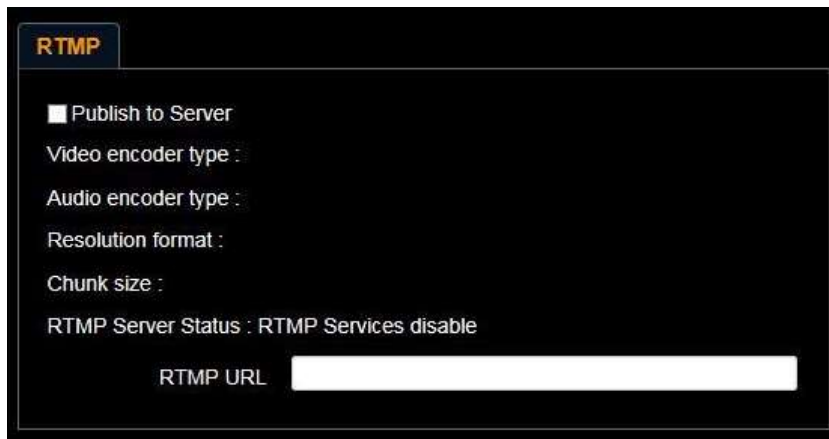


<Remark> To upload to YouTube for online viewing, please refer to [7.3.9 Settings – Audio Setting](#) and turn on sound

7.3 Web Page Function Description

7.3.1 Login Screen

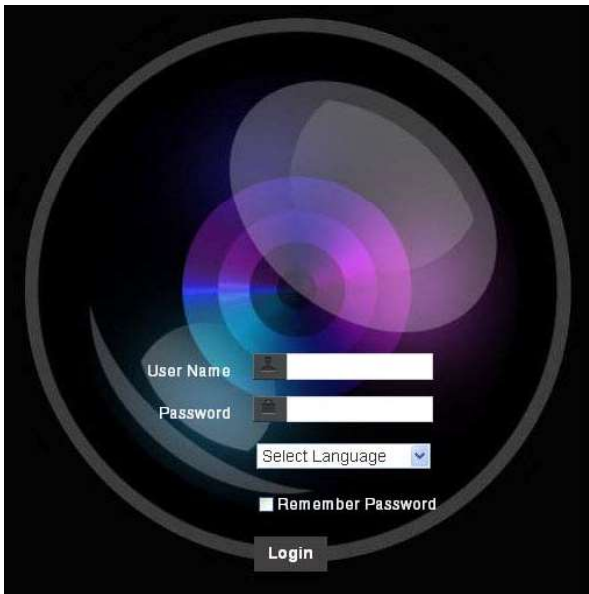
	Username: Enter user account
	Password: Enter user password
	Select Language: Select language from English, Traditional Chinese and Simplified Chinese
	Remember password: Remember the password so that you do not need to type it next time
	Login: Log into the administrator screen on the website

7.3.2 Preview Screen

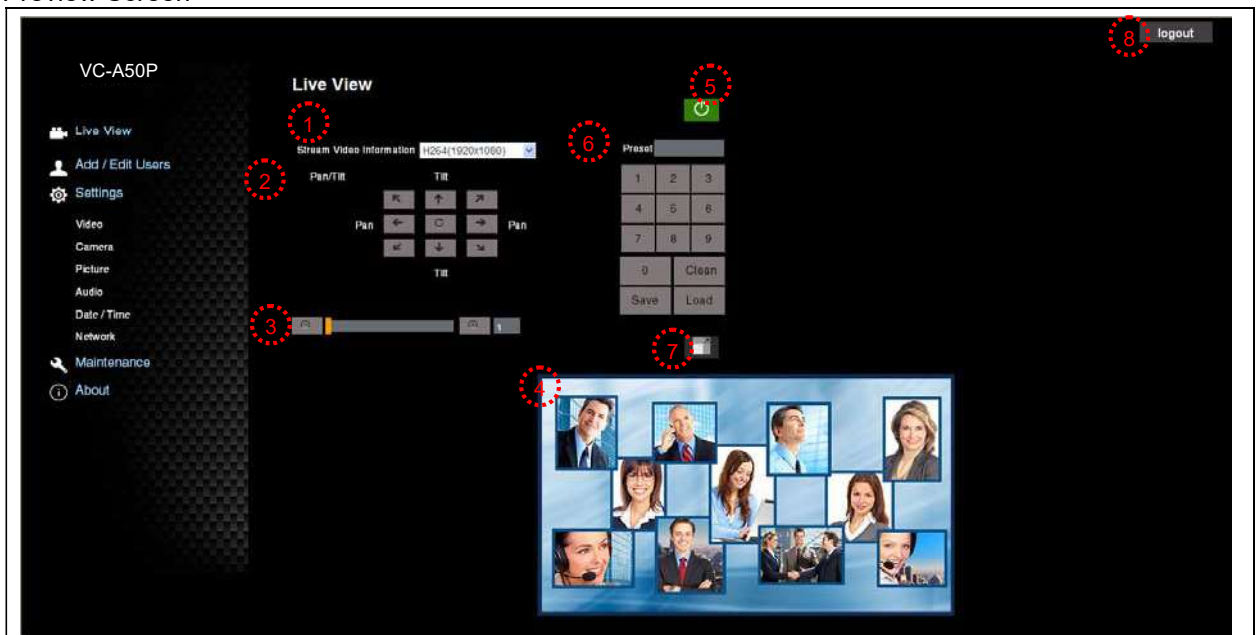

1. Information about image encoding form and resolution
2. Rotate camera angle
3. Zoom in/out
4. Preview window
5. Power off VC-A50P
6. Apply/Set preset
7. Switch to Full Screen
8. Logout

7.3.3 Account management screen

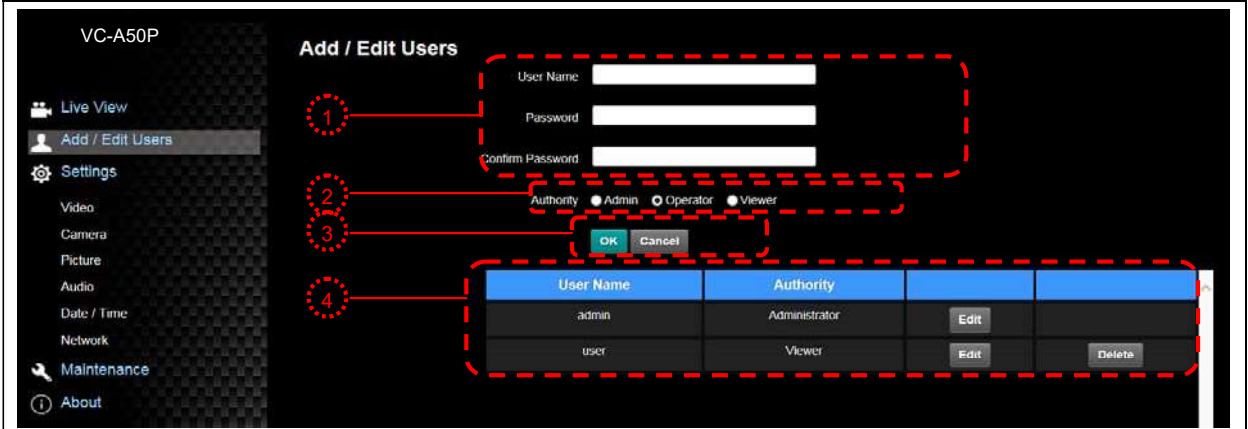

1. Enter new username and password

2. Set the permissions: Description for permissions is listed in the following table

3. Apply

4. List of accounts:


Edit: Change password and permission of new account

Delete: Delete new account

<Remark> Reference for User Permissions

User Type	Admin	Operator	Viewer
View images	Y	Y	Y
Settings	Y	Y	N
User accounts management	Y	N	N

7.3.4 Settings – Video Setting

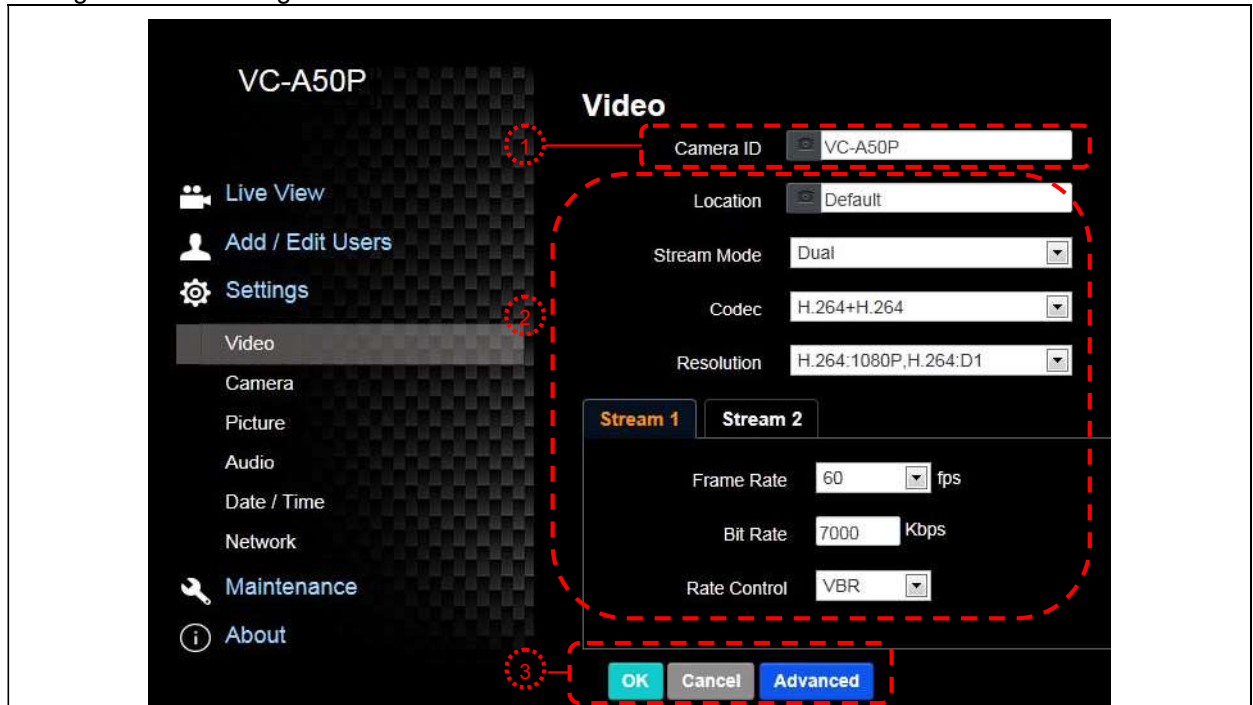


1. Camera name: Change camera name on this page

2. Select rate and encoding

3. Storage setting; for advanced settings, see [7.3.5 Settings –Advanced Video Setting](#)

7.3.5 Settings –Advanced Video Setting

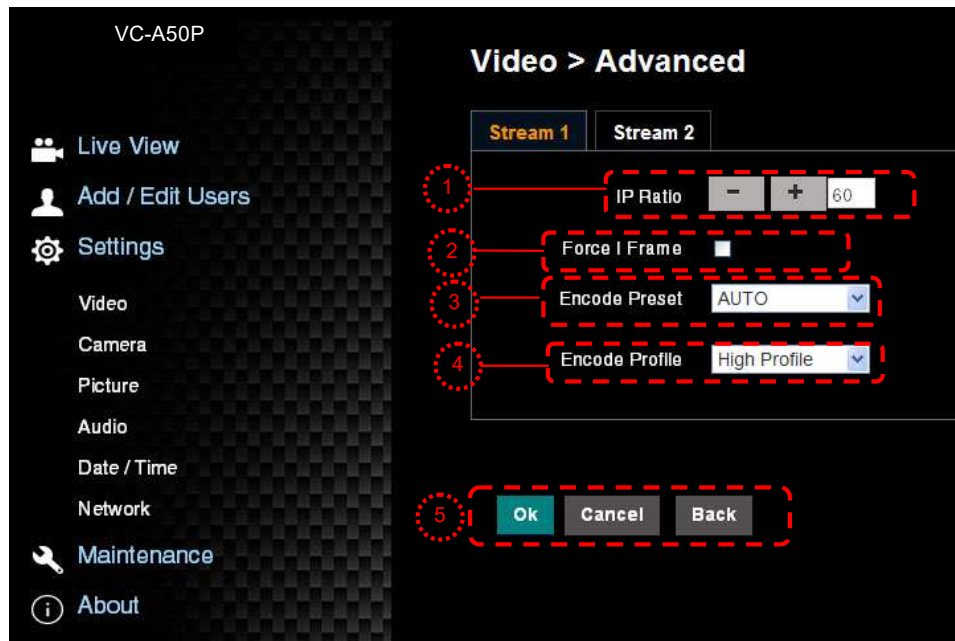

1. IP Ratio: Set IP Ratio, from 1 to 60

2. Force I Frame :

Check this item to insert IDR frame into specified series flow and apply its setting. User's setting will be reserved and displayed in GUI interface

3. Encode Preset :

Auto: Select between speed and quality depending on the encoding method used (e.g. HIGH_SPEED mode for refresh rate of 60 frames per second and HIGH_QUALITY mode for high image quality)

HIGH_SPEED: Refresh rate of 60 frames per second is available

HIGH_QUALITY: Higher image quality can be obtained.

SVC: SVC opened encoding mode is applicable to RTSP series flow of 8601, 8602, 8603 and 8604 ports, different refresh rate for different ports. See remark

4. Encode Profile: Encoded Information

5. Preset Save

<Remark> SVC connection address: rtsp://VC IP Address:Port/h264

1. **60Frame** : rtsp://VC IP Address:8557/h264, E.g.: <rtsp://192.168.100.150:8557/h264>


2. **30Frame** : rtsp://VC IP Address:8601/h264, E.g.: <rtsp://192.168.100.150:8601/h264>

3. **15Frame** : rtsp://VC IP Address:8602/h264, E.g.: <rtsp://192.168.100.150:8602/h264>

4. **7Frame** : rtsp://VC IP Address:8603/h264, E.g.: <rtsp://192.168.100.150:8603/h264>


5. **3Frame** : rtsp://VC IP Address:8604/h264, E.g.: <rtsp://192.168.100.150:8604/h264>

7.3.6 Setting - camera

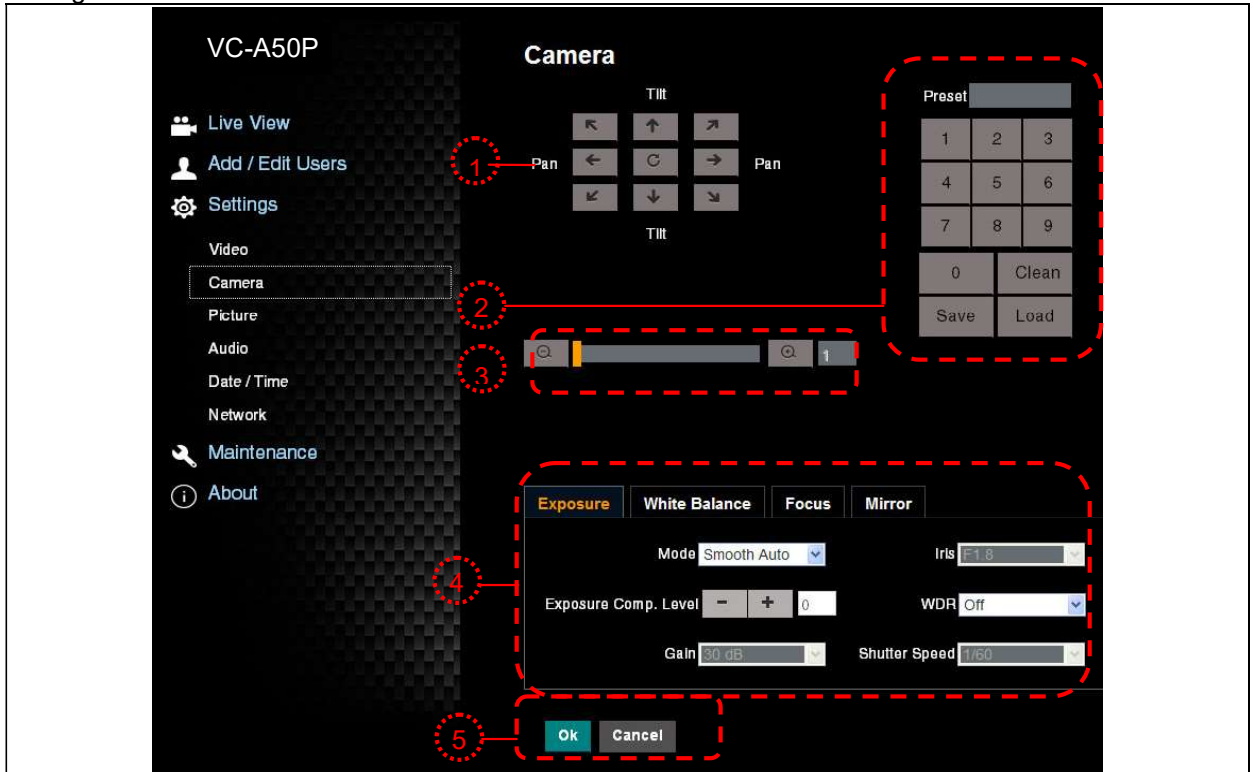

1. Rotate camera lens angle
2. Save/Read preset
3. Adjust image size
4. Adjust camera settings. Please refer to [7.3.7 Settings - Advanced Camera Setting](#)
5. Preset Save


7.3.7 Settings –Advanced Camera Setting

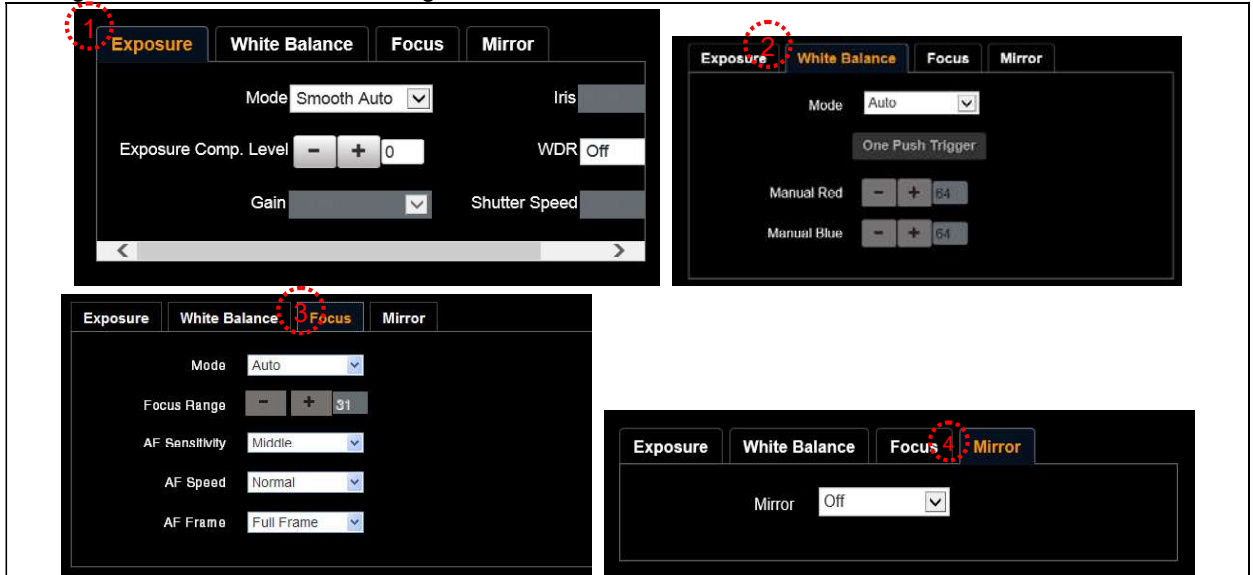

- 1.. Exposure:
- **Mode:** Select exposure mode
 - **Exposure Comp. Level:** Select exposure compensation level
 - **Gain:** Adjust gain restriction
 - **Iris:** Iris setting
 - **WDR:** WDR settings

<ul style="list-style-type: none"> ● Shutter Speed: Shutter settings
<p>2. White Balance:</p> <ul style="list-style-type: none"> ● Mode: Select the color temperature mode ● Open Push Trigger: Single color temperature execution adjustment ● Manual Red/Blue: Manually adjust blue/red color temperature
<p>3. Focus:</p> <ul style="list-style-type: none"> ● Mode: Select manual/automatic focus ● Focus Range: Set focus range ● AF Sensitivity: Set automatic focus sensitivity ● AF Speed: Set automatic focus speed ● AF Frame: Set automatic focus range
<p>4. Mirror:</p> <ul style="list-style-type: none"> ● Mirror: Set automatic flip mode


7.3.8 Settings – Picture Setting

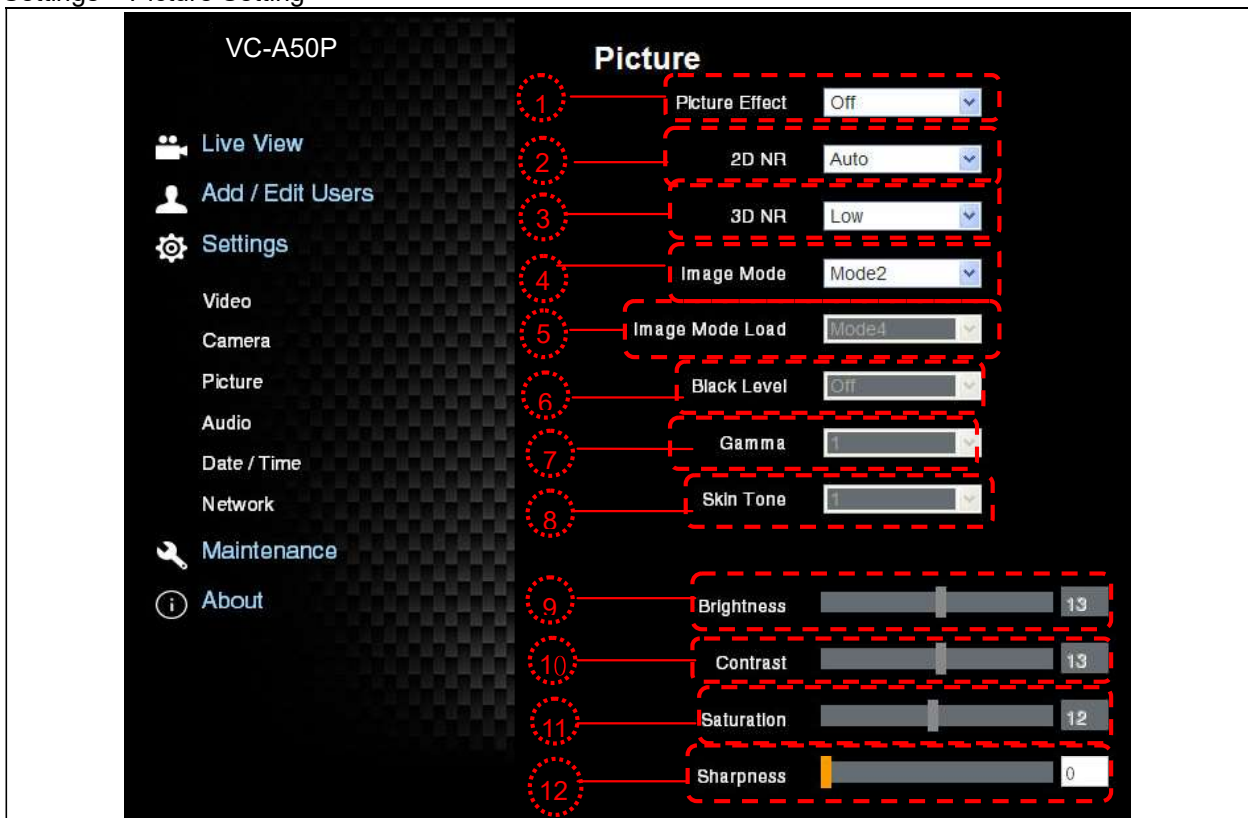

1. Picture Effect: Set the picture effect
2. 2D NR: 2D noise reduction settings
3. 3D NR: 3D dynamic noise reduction settings
4. Image Mode: The user may customize his/her desired image mode
5. Image Mode Load: Adjustable when <i>Image Mode</i> is set to <i>Custom</i> , similar to OSD
6. Black Level: Adjustable when <i>Image Mode</i> is set to <i>Custom</i> , similar to OSD
7. Gamma: Adjustable when <i>Image Mode</i> is set to <i>Custom</i> , similar to OSD
8. Skin Tone: Skin tone settings; adjustable when <i>Image Mode</i> is set to <i>Custom</i> , similar to OSD
9. Brightness: Adjustable when <i>Image Mode</i> is set to <i>Custom</i> , similar to OSD
10. Contrast: Adjustable when <i>Image Mode</i> is set to <i>Custom</i> , similar to OSD
11. Saturation: Adjustable when <i>Image Mode</i> is set to <i>Custom</i> , similar to OSD


12. Sharpness: Adjust the sharpness of the image

7.3.9 Settings – Audio Setting

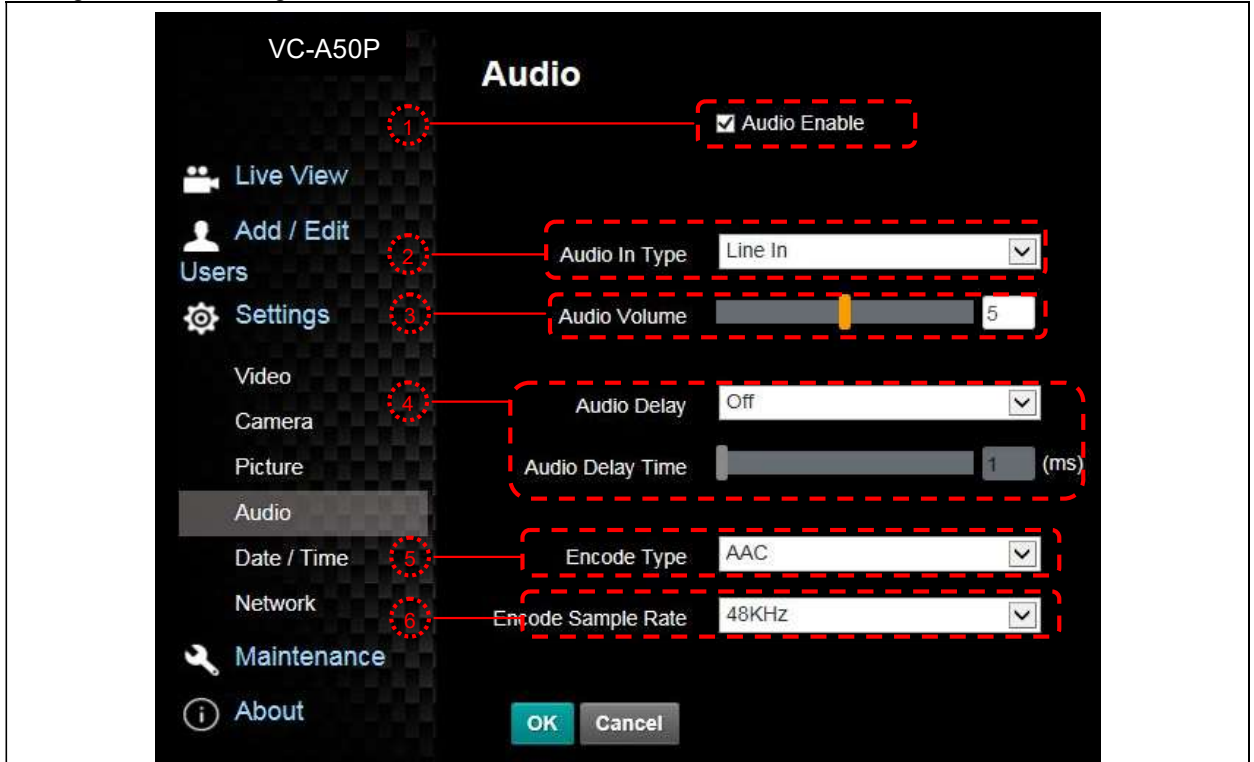

1. Turn on/off sound
2. Set **MIC In/Line In**
3. Adjust the Volume
4. Set **audio delay**
5. Set **Encode Type (ACC / G.711)**
6. Set **Encode Sample rate**
7. Preset Save

7.3.10 Settings- Date/ Time Setting

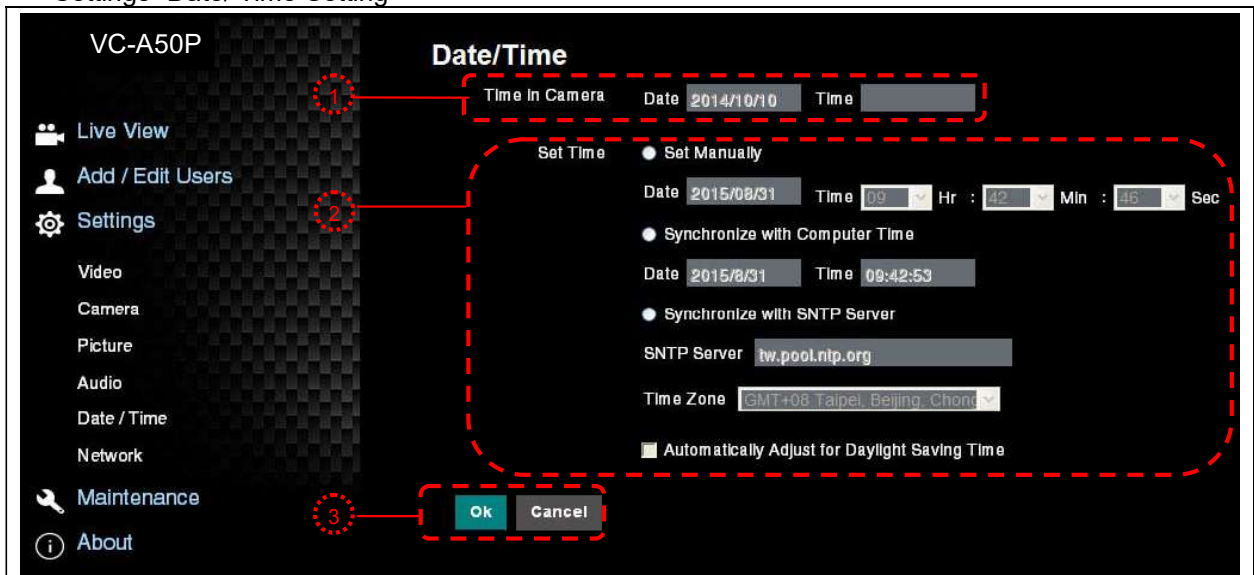

1. Current camera date and time
2. Set the Time: Manual setting/synchronous computer time/synchronous SNTP server time/time of

automatic adjustment of daylight saving

3. Preset Save

<Remark> SNTP server address: Please change in network setting

7.3.11 Setting -- Network and Port Setting

The screenshot shows the 'Network' configuration menu. It is divided into several sections: 'Network', 'RTMP', 'RTSP', 'MPEG-TS', 'SNTP', and 'Port-Setting'. Red dashed boxes and numbers 1 through 7 highlight specific settings: 1. DHCP dropdown menu; 2. RTMP 'Publish to Server' checkbox; 3. RTSP 'Enable Multicast' checkbox; 4. MPEG-TS 'Enable MPEG-TS' checkbox; 5. SNTP 'SNTP Server' text field; 6. Port-Setting 'HTTP Port' and 'HTTPS Port' text fields; 7. 'OK' and 'Cancel' buttons at the bottom.

1. Network address of camera: Change of setting is available only when DHCP function of camera is turned off; please turn off DHCP function using VC-A50P screen menu, and for setting of each item of screen menu, see [5.2 Setting Menu](#)

2. Set RTMP: Set connection address of RTMP depending on RTMP Server setting

3. Set RTSP: Enable/Disable Multicast

<Remark> It is suggested to enable Multicast when the number of users online watching the live image simultaneously is more than 4.

4. Set MPEG-TS: Set MPEG-TS format

5. Set SNTP: Set SNTP Server IP

6. Set HTTP port. The default Port value is 80

<Remark> Change of setting is available only when DHCP function of camera is closed

7. Preset Save

The screenshots illustrate the following steps in the maintenance process:


1. Firmware Upload
2. Error Log
3. Factory Reset
4. Set ONVIF command as “standard” or “custom”
5. NDI registration information

Chapter 8 DIP switch setting

<Note> Please turn off the machine before changing DIP switch setting.


8.1 DIP SWITCH

8.1.1 OUTPUT Switch



Output Mode	Setting	Output Mode	Setting
1920x1080/60p		1920x1080/50p	
1920x1080/30p		1920x1080/25p	
1920x1080/60i		1920x1080/50i	
1280x720/60p		1280x720/50p	
1080/59.94p		1080/59.94i	
1080/29.97p		720/59.94p	

8.1.2 IR SELECT




ID	Setting
1	
2	
3	

8.1.3 Camera Address Selector



Setting	Function Descriptions
0~7	ID 0~7
8~9	Reserved


8.1.4 System Switch



Setting	Function Descriptions
DIP 1	RS-232C/RS-422 selector OFF : RS-232C / ON : RS-422
DIP 2	Infrared signal output switch OFF : Off / ON : On
DIP 3	Communication baud rate selector OFF : 9600 / ON : 38400
DIP 4	Reserved

8.2 RS-422 Connection

8.2.1 RS-422 Pin Description




Pin NO.	Function
1	RXD OUT -
2	RXD OUT +
3	TXD OUT -
4	TXD OUT +
5	GND
6	RXD IN -
7	RXD IN +
8	TXD IN -
9	TXD IN +

<Note>


Please connect IN+ to OUT+ when connecting to SONY products
For non-SONY products, it may be necessary to connect IN+ to OUT-

8.2.2 Use RS-422 Connection


1. Hold the two sides of RS-422 connector and pull out in the direction shown by the arrow in the figure below



2. Peel off a section of copper wire (AWG Nos.28 to 18) and insert it into the connector hole; then use flat screw driver to fix it



3. Insert the wired RS-422 connector back to the camera. Now the connection is completed



<Note> When RS-422 connection is being used, do not use RS-232C connection.

Chapter 9 Troubleshooting

This chapter describes problems you may encounter while using VC-A50P. If you have questions, please refer to related chapters and follow all the suggested solutions. If the problem still occurred, please contact your distributor or the service center.

No.	Problems	Solutions
1.	Boot without power signal	<ol style="list-style-type: none"> 1. Make sure you have plugged in the power cord. 2. Make sure the Service DIP switch is Off. 3. Make sure that the terminal point is a hub that supports IEEE 802.3at when connecting via PoE.
2.	There is no image output from VC-A50P	<ol style="list-style-type: none"> 1. Check the power. 2. Check if DIP switch is properly set. Please refer to Chapter 8 DIP Switch Setting for related settings. 3. Make sure the display supports the output resolution; in general, the resolution is 1080p60/1080i60/720p60. 4. Replace the cables and make sure they are not faulty.
3.	VC-A50P image is severely delayed	Please use 1080p or 720p 60/50 Hz signals rather than 25/30 Hz signals.
4.	Not working after changes to DIP Switch setting	After completing DIP Switch setting, unplug and reconnect the power cord and turn on the machine to change the setting.
5.	VC-A50P cannot be operated by remote control	<ol style="list-style-type: none"> 1. Please confirm if the Camera Select on the remote control can be used together with the IR Select on VC-A50P. 2. Please prevent VC-A50P from direct sunshine. 3. Make sure the energy-saving bulb and the IR touch screen are as far as possible in order to avoid interference. 4. When several VC-A50P are connected in the same area, the operation of two remote controls at the same time may result in signal interference. It is recommended to use one remote control only.
6.	The device cannot be controlled with Codec	<ol style="list-style-type: none"> 1. Please consult the distributor to make sure the firmware version is the latest one. The steps to check version is as follows: <ol style="list-style-type: none"> 1.1 Press [MENU] on the remote control 1.2 Choose [Status] 1.3 Go to Page 5 of [System] 1.4 Make sure the firmware version is correct. 2. Make sure the connection is correct (RS-232/422 Input). 3. Make sure System Switch DIP 1 and DIP 3 are correct.
7.	The device cannot be controlled with RS-232/RS422	<ol style="list-style-type: none"> 1. Make sure the connection is correct (RS-232/422 Input). 2. Make sure System Switch DIP 1 and DIP 3 are correct.
8.	Whether the Internet can be used for operation	Please refer to Chapter 7 Network Function Description for the Internet usage